
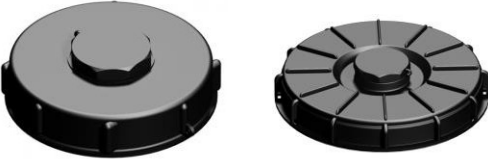
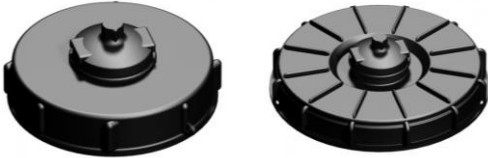



IBC connectors - covers / caps

<p>Lid for pallet container with female thread DIN EN 12713 (EPDM seal)</p> 	index	female thread size DIN EN 12713
	AC-IBF-P150	150 mm (6")
	AC-IBF-P150X	

<p>Lid for pallet container with 2" GW opening can be used for filling (EPDM seal)</p>  <p>150 mm (6") 220 mm (9")</p>	index	Internal thread size DIN EN 12713	hole thread size
	AC-IBF-P150-F200	150 mm (6")	GW 2" BSP
	AC-IBF-P220-F200	220 mm (9")	GW 2" BSP

<p>Lid with 2" vent for pallet container with female thread DIN EN 12713 (EPDM sealing)</p>  <p>150 mm (6") 220 mm (9")</p>	index	Internal thread size DIN EN 12713	thread size for air vent
	AC-IBF-P150-F200-V	150 mm (6")	GW 2" BSP
	AC-IBF-P150-F200-VX*	150 mm (6")	GW 2" BSP
	AC-IBF-P220-F200-V	220 mm (9")	GW 2" BSP

* - red colour version

<p>Lid for quick filling / emptying of the pallet container (two vents)</p> 	index	Internal thread size DIN EN 12713	BSP female thread size
	AC-IBF-P150-F200-DV	150 mm (6")	2"