









AKBO insulated hot water guns - stainless steel

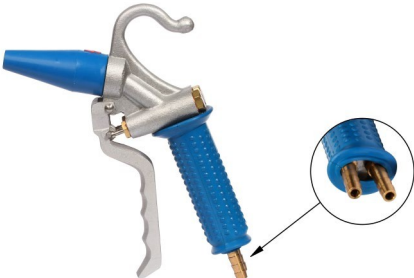
drawing	index	version	connection (inlet)	description
	AK-RHP01-R	insulated, trigger guard bail, red	GW 1/2" BSP	<p>AKBO insulated stainless steel hot water gun. Body in AISI 316 steel, trigger and trigger guard in AISI 304 steel. EPDM rubber boot, Viton seals (FDA). Teflon-air-insulation of the handle and trigger guard bow guarantee safe operation. It is not designed for steam! It has an adjustable outlet nozzle, infinite flow control and trigger lock. Available in a compact version for holding with one hand (AK-RHP01-R and AK-RHPB1-R) or in a version with an integrated lance (AK-RHP02-R-L40) for holding with both hands.</p> <p>Operating pressure: 24 bar Max. operating temperature: +95°C Weight: approx. 0.98 kg (1.2 kg version with lance) Flow rate: 30 l/min (5 bar), 70 l/min (24 bar) Increased flow rate version: 48 l/min (5 bar), 120 l/min (24 bar)</p>
	AK-RHPB1-R	insulated, drain cover bail, with increased flow (BIG FLOW), colour red		
	AK-RHP02-R-L40	insulated, trigger guard shackle, integrated lance 40 cm, red		

AKBO insulated hot water guns - spare parts

drawing	index	description
 	AK-RECOVER-RHP-R	Hot water gun top cover: AK-RHP..., in EPDM rubber, red
	AK-REGRIPP-RHP-R	pistol grip cover: AK-RHP..., in EPDM rubber, red
	AK-RESAKRV	Hot water gun valve repair kit AK-RHP01-R
	AK-RESAKRB	valve repair kit for hot water gun with increased flow (BIG FLOW) - AK-RHPB1-R
	AK-RESAKRV-L40*	Valve repair kit for hot water gun with lance: AK-RHP02-R-L40
	AK-RESCLIP	safety pin for trigger-lock pistol

* image in table for reference - may vary with AK-RESAKRV-L40 index

AKBO water-air gun

drawing	index	connection (inlet)	description
	AK-AWLU1-BL	2 x 10 mm hose connector	<p>Lightweight water-air gun (air is used to increase the force of the spray with relatively low water consumption). Made of aluminium, chrome-plated brass tips, EPDM rubber cap, plastic nozzle. The trigger lever opens and closes the water and air flow simultaneously. Suitable for cleaning equipment, machinery, surfaces and vehicles. Used, among others, in the meat industry for cleaning mesh aprons, gloves, grates, etc. Max. operating pressure: 5 bar Weight: 0.872 kg</p>

