## The Band-It banding system®




# Band-It® Ultra-Lok®

**High-strength banding system in the form of a ready clamp or in lengths**

**Band width:** 1/2” (12.7 mm), 3/4” (19.1 mm)
**Band thickness:** 0.76 mm
**Material:** AISI 201 steel

The strongest of the clamping systems for the most demanding applications. Band supplied as a ready-made double-loop clamp with a built-in buckle or in lengths of various sizes for forming into clamps on the hose (single or double loop). **The double loop increases clamp strength.** The smooth surface of the band and its correct assembly on a non-corrugated hose create a leak-tight fixing of the hose end. **Assembly** using the BD-UL4000B tool.

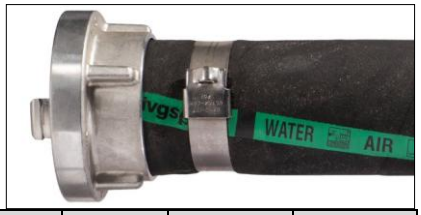


| index (AISI 201) | width band [inch] | wall band [mm] | max. inner loops [mm] | packaging [pcs.] |
|---|---|---|---|---|
| BD-UL2279 | 3/4” (19.1 mm) | 0,76 | 50 | 100 |
| BD-UL2109 | 3/4” (19.1 mm) | 0,76 | 69 | 50 |
| BD-UL2119 | 3/4” (19.1 mm) | 0,76 | 76 | 50 |
| BD-UL2129 | 3/4” (19.1 mm) | 0,76 | 88 | 50 |
| BD-UL2139 | 3/4” (19.1 mm) | 0,76 | 101 | 25 |
| BD-UL2149 | 3/4” (19.1 mm) | 0,76 | 114 | 25 |
| BD-UL2159 | 3/4” (19.1 mm) | 0,76 | 127 | 25 |

| index (AISI 201) | width band [inch] | wall band [mm] | max. inner loops [mm] | packaging [pcs.] |
|---|---|---|---|---|
| BD-UL2709 | 3/4” (19.1 mm) | 0,76 | 139 | 25 |
| BD-UL2169 | 3/4” (19.1 mm) | 0,76 | 152 | 25 |
| BD-UL2179 | 3/4” (19.1 mm) | 0,76 | 165 | 25 |
| BD-UL2189 | 3/4” (19.1 mm) | 0,76 | 177 | 25 |
| BD-UL2199 | 3/4” (19.1 mm) | 0,76 | 203 | 25 |
| BD-UL2289 | 3/4” (19.1 mm) | 0,76 | 228 | 10 |

| drawing (band in lengths) | index (AISI 201) | band width [inch] | length band [mm] | maximum loop diameter [mm] | | packaging [pcs.] |
|---|---|---|---|---|---|---|
| | | | | single | double | |
|  | BD-UL1024 | 1/2” (12.7 mm) | 610 | 127 | 64 | 50 |
| | BD-UL1032 | | 813 | 178 | 89 | 50 |
| | BD-UL1046 | | 1168 | 279 | 140 | 25 |
| | BD-UL1070 | | 1778 | 457 | 229 | 25 |
| | BD-UL1096 | | 2438 | 635 | 318 | 25 |
| | BD-UL2028 | 3/4” (19.1 mm) | 711 | 152 | - | 21 |
| | BD-UL2032 | | 813 | 178 | 89 | 19 |
| | BD-UL2036 | | 914 | 252 | 102 | 33 |
| | BD-UL2040 | | 1016 | 254 | 127 | 30 |
| | BD-UL2044 | | 1118 | 267 | 140 | 27 |
| | BD-UL2060 | | 1524 | 381 | 191 | 20 |
| | BD-UL2084 | | 2134 | 559 | 280 | 14 |
| | BD-UL2120 | | 3048 | 826 | 407 | 10 |
| | BD-UL2150 | | 3810 | 1029 | 508 | 8 |

| drawing | index | size [inch] | packaging [pcs.] |
|---|---|---|---|
|  | BD-UB2549 | 1/2” | 100 |
| | BD-UB2569 | 3/4” | 100 |






Tool for fitting Ultra-Lok® clamps powered by a lithiumlithium-ion battery. Supplied in a protective case made of impact-resistant HDPE thermoplastic. The tool set includes: one spare 18 V lithium-ion battery, one charger, a lubrication/assembly tool kit and an operating manual.