
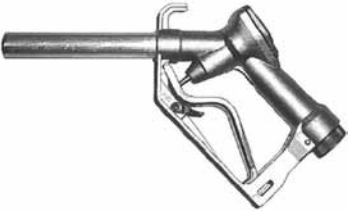






# INDUSTRIAL FITTINGS - fittings, connectors

## Fuel nozzles

picture	code	connection	exit diameter	description
	BO-222	1" BSP female (swivel)	25 mm	Intended for diesel oil (not suitable for Ad-Blue and unleaded petrol). Not equipped with an automatic fuel shut off system. Not suitable for application on fuel dispensers at petrol stations. Material: polypropylene. Colour: black. Flow rate: 60 ÷ 80 l/min.
	BO-223	1" BSP female (swivel)	25 mm	Intended for diesel oil (not suitable for Ad-Blue and unleaded petrol). Not equipped with an automatic fuel shut off system. Not suitable for application on fuel dispensers at petrol stations. Material: aluminium. Colour: silver. Flow rate: 60 ÷ 120 l/min.
	BO-227	1" BSP female (swivel)	24 mm	Intended for diesel oil (not suitable for Ad-Blue and unleaded petrol). Equipped with an automatic fuel shut off system. Suitable for application on all fuel dispensers at petrol stations. Material: rubber coated aluminium. Colour: black. Flow rate: 60 l/min.
	BO-227V	1" BSP female (swivel)	21 mm	Intended for unleaded petrol (not suitable for AdBlue and diesel oil). Equipped with an automatic fuel shut off system. Suitable for application on all fuel dispensers at petrol stations. Material: rubber coated aluminium. Colour: green. Flow rate: 60 l/min.
	BO-223X	1" hose tail	18 mm	Intended for AdBlue and water. Not intended for diesel oil and unleaded petrol. Not equipped with an automatic fuel shut off system. Material: polyamide reinforced with fibre glass. Colour: blue. Flow rate: 60 l/min.
	BO-227X	1" BSP female (swivel)	18 mm	Intended for AdBlue and water. Not intended for diesel oil and unleaded petrol. Equipped with an automatic fuel shut off system. Suitable for application on all fuel dispensers at petrol stations. Material: rubber coated stainless steel. Colour: blue. Flow rate: 40 l/min.