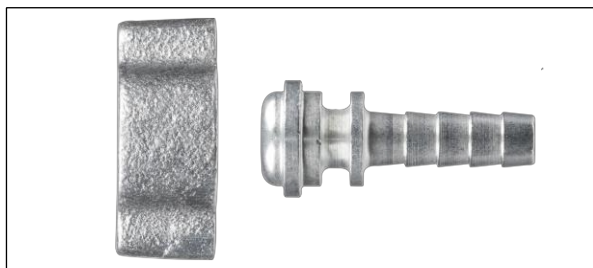


**Rubber hose ends and clamps for steam hoses - type DIXON™BOSS™**

**Caps B, ends GB**
**Components of the GF BOSS™tip**

**Material:** steel or galvanised cast iron, stainless steel AISI 316, brass

**Operating pressure:** 18 bar (+210°C) - saturated steam, other applications: selection in contact with Tubes International

**Operating temperature:** up to +230°C

Wing nuts B for the GF female threaded tips of the BOSS™system and spherical tips GB for these tips. Used as replacement parts for GF tips. Allow flexible configuration of complete tips using various GFB, GMB, GDB adaptors and mixed material versions.

Hose inside diameter		tip GB			nut size [inch]	nut B			
[inch].	[mm].	index	material	manufacturer's symbol		index	material	manufacturer's symbol	
1/4"	6	DX-GB-04	galvanised steel	GBA	1/4"	DX-B-04	galvanised cast iron	BA2	
3/8"	10	DX-GB-06	galvanised steel	GCA	3/8"	DX-B-06	galvanised cast iron	CB	
1/2"	13	DX-GB-08	galvanised steel	GB1	1/2"	DX-B-08	galvanised cast iron	B2	
3/4"	19	DX-GB-12	galvanised steel	GB6	3/4" / 1"	DX-B-16	galvanised cast iron	B12	
		DX-GB-12-SS	AISI 316 steel	RGB6		DX-B-16-SS	AISI 316 steel	RB12	
		DX-GB-12-B	brass	BGB6		DX-B-16-B	brass	BB12	
1"	25	DX-GB-16	galvanised steel	GB11		DX-B-16	galvanised cast iron	B12	
		DX-GB-16-SS	AISI 316 steel	RGB11		DX-B-16-SS	AISI 316 steel	RB12	
		DX-GB-16-B	brass	BGB11		DX-B-16-B	brass	BB12	
1.1/4"	32	DX-GB-20	galvanised cast iron	GB16	1.1/4" / 1.1/2"	DX-B-24	galvanised cast iron	B17	
		DX-GB-20-SS	AISI 316 steel	RGB16		DX-B-24-SS	AISI 316 steel	RB17	
1.1/2"	38	DX-GB-24	galvanised cast iron	GB21		DX-B-24	galvanised cast iron	B17	
		DX-GB-24-SS	AISI 316 steel	RGB21		DX-B-24-SS	AISI 316 steel	RB17	
2"	50+ 51	DX-GB-32*	galvanised cast iron	GB26		2"	DX-B-32	galvanised cast iron	B27
		DX-GB-32-SS*	AISI 316 steel	RGB26			DX-B-32-SS	AISI 316 steel	RB27
2.1/2"	63+ 65	DX-GB-40	galvanised cast iron	GB31	2.1/2"	DX-B-40	galvanised cast iron	B32	
3"	75+ 76	DX-GB-48	galvanised cast iron	GB36	3"	DX-B-48	galvanised cast iron	B37	
4"	100+ 102	DX-GB-64	galvanised cast iron	GB46	4"	DX-B-64	galvanised cast iron	B47	
6"	150+ 152	DX-GB-96	galvanised cast iron	GB66	6"	DX-B-96	galvanised cast iron	B67	

\* - Note: Due to the structurally reduced lock (flange) of the 2" tips (DX-GB-20, DX-GB-20-SS and the complete GF tips: DX-GF-32-32, DX-GF-32-32-SS, DX-GF-32-32-NPT, DX-GF-32-32-SS-NPT) - the 2" SBC clamps with 4 claws should not be used with these tips: DX-SBC4-32-57-63, DX-SBC4-32-64-70 and DX-SBC4-32-70-77\*.


**Connectors M**
**Couplings for steam hose sections, type BOSS™**

**Material:** steel or galvanised cast iron,

**Operating pressure:** 18 bar (+210°C) - saturated steam, other applications: consult Tubes International

**Operating temperature:** up to +230°C

Couplings for rubber sections of steam hoses. Designed to be mounted with SBC steam clamps (type BOSS™).

Hose inside diameter		connector M		
[inch].	[mm].	index	material	manufacturer's symbol
1/2"	13	DX-M-08	galvanised steel	M1
3/4"	19	DX-M-12	galvanised cast iron	M6
1"	25	DX-M-16	galvanised cast iron	M11
1.1/4"	32	DX-M-20	galvanised cast iron	M16
1.1/2"	38	DX-M-24	galvanised cast iron	M21
2"	50+ 51	DX-M-32	galvanised cast iron	M26
2.1/2"	63+ 65	DX-M-40	galvanised cast iron	M31
3"	75+ 76	DX-M-48	galvanised cast iron	M36