

INDUSTRIAL HOSES - steam

Fittings for steam hoses




MS fitting

Material: Steel, malleable iron, stainless steel, brass

Male BSPT thread fitting that provides a safe connection between a hose and an installation. Assembled on the hose with a SBC clamp.

code (steel)	code (malleable iron)	code (stainless steel)	code (brass)	thread [inch]	hose I.D. [inch]
DX-MS-04-04	-	-	-	1/4	1/4
DX-MS-04-06	-	-	-	3/8	1/4
DX-MS-06-06	-	-	-	3/8	3/8
DX-MS-08-08	-	DX-MS-08-08-SS	-	1/2	1/2
DX-MS-12-12	-	DX-MS-12-12-SS	DX-MS-12-12-B	3/4	3/4
DX-MS-12-16	-	-	-	1	3/4
DX-MS-16-12	-	-	-	3/4	1
DX-MS-16-16	-	DX-MS-16-16-SS	DX-MS-16-16-B	1	1
-	DX-MS-20-20	DX-MS-20-20-SS	DX-MS-20-20-B	1.1/4	1.1/4
-	DX-MS-24-24	DX-MS-24-24-SS	DX-MS-24-24-B	1.1/2	1.1/2
-	DX-MS-32-32	DX-MS-32-32-SS	DX-MS-32-32-B	2	2
-	DX-MS-40-40	DX-MS-40-40-SS	-	2.1/2	2.1/2
-	DX-MS-48-48	DX-MS-48-48-SS	DX-MS-48-48-B	3	3
-	DX-MS-64-64	-	-	4	4

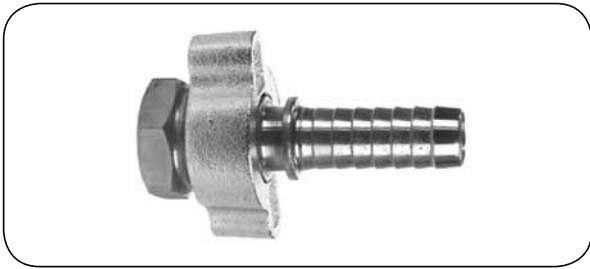

GF fitting

Material: Steel/malleable iron, stainless steel, brass

Female BSP thread fitting that provides a safe connection between a hose and an installation. Assembled on the hose with a SBC clamp.

code (steel/malleable iron)	code (stainless steel)	code (brass)	thread [inch]	hose I.D. [inch]
DX-GF-04-04	-	-	1/4	1/4
DX-GF-06-06	-	-	3/8	3/8
DX-GF-08-08	-	-	1/2	1/2
DX-GF-12-12	DX-GF-12-12-SS	DX-GF-12-12-B	3/4	3/4
DX-GF-16-16	DX-GF-16-16-SS	DX-GF-16-16-B	1	1
DX-GF-20-20	DX-GF-20-20-SS	DX-GF-20-20-B	1.1/4	1.1/4
DX-GF-24-24	DX-GF-24-24-SS	DX-GF-24-24-B	1.1/2	1.1/2
DX-GF-32-32	DX-GF-32-32-SS	DX-GF-32-32-B	2	2
DX-GF-40-40	-	-	2.1/2	2.1/2
DX-GF-48-48	-	-	3	3
DX-GF-64-64	-	-	4	4
DX-GF-80-80	-	-	6	6