Special air blow guns



Waxing gun

Gun for applying anti-corrosion agents


Max. working pressure: 10 bar
Recommended press.. pressure: 2 ÷ 6 bar
Working temperature: from +5°C to +50°C
Material: cast aluminium (gun body)

Aluminium gun with a 3 mm diameter nozzle and jet adjustment for applying anti-corrosion agents, e.g. wax. Uses vacuum to draw low-viscosity liquid from the tank. Gun body made of cast aluminium. Plastic tank with a capacity of 1 l (EW-125363 – gun with 6 mm end for suction hose). Conical spray - approx. 40°.

index	version	connection	mass [kg]
EW-125241	with straight nozzle	quick-coupling plug DN 7.2	0,85
EW-125341	with 360° rotating nozzle	quick-coupling plug DN 7.2	0,77
EW-125363	with 6 mm end for suction hose	quick-coupling plug DN 7.2	0,33

Air consumption / suction height

working pressure [bar]			2	3	4	5	6	7	8
consumption air	nozzle straight	m^3/h	2,5	3	3,6	4,3	5	5,7	6,5
		l/min	42	50	60	72	83	95	108
	nozzle rotating	m^3/h	3,2	4,2	5,2	6,3	7,4	8,5	9,6
		l/min	53	70	87	105	123	142	160
suction height [m]	straight nozzle		4	5,5	6,5	7	6,5	5,5	4
	rotating nozzle		2,5	4,2	5,5	6	6,5	7	6,5

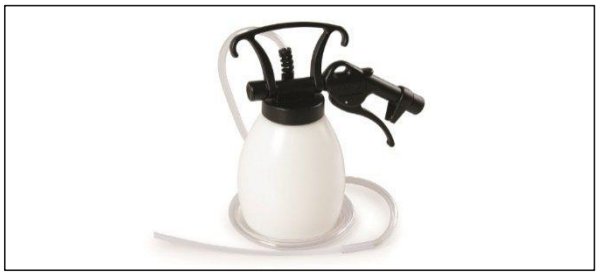

Suction gun

Gun for extracting oil and operating fluids

Work. pressure: 6 ÷ 12 bar
Flow: 180 l/min, Pe = 8 bar
Material: acetal (gun, handle, cover, valve)
polyethylene (PE) (tank)
PVC (suction hose)
polyamide (PA11) tube
Seal: NBR

Easy-to-use gun with a 1.2 l tank, compressed-air powered, made of durable and corrosion-resistant acetal, designed for extracting e.g. engine oil, hydraulic oil, coolant, etc. Fitted as standard with a transparent tank for easy monitoring of the oil or other fluids being extracted, and with a 1.5 metre suction hose ending in a rigid tube with an outer diameter of Ø10 mm. Continuous operation is possible thanks to the lever lock. For engine oil, extraction is recommended while the engine is warm – min. oil temp. 50°C. **Note! Do not use with explosive liquids, e.g. petrol**.

index	description	connection
JW-147150-134	suction gun	GW 1/4” BSP
JW-143300-000	1.2 l plastic tank	-
JW-143160-000	1.2 l plastic tank with cover	-