















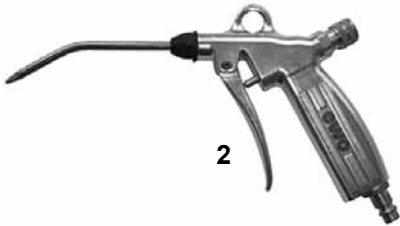

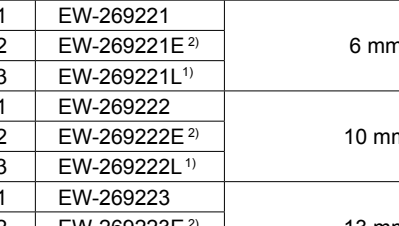
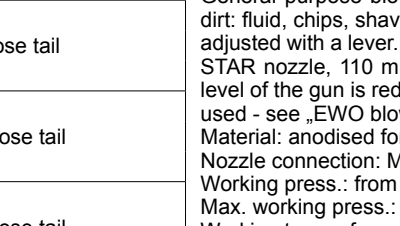
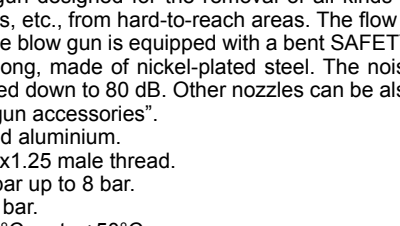
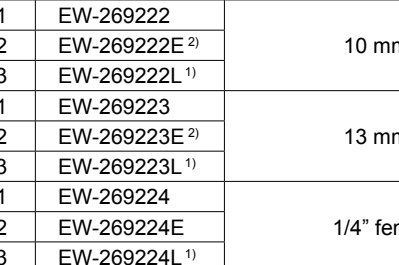
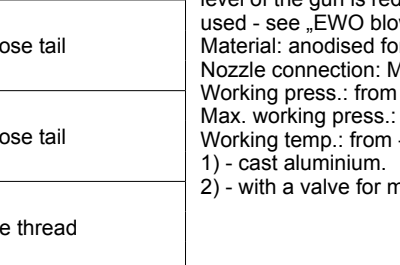
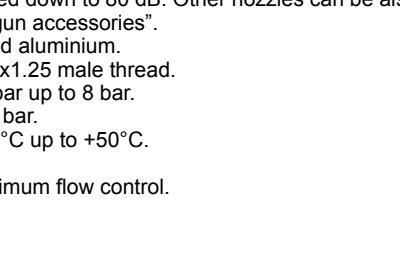
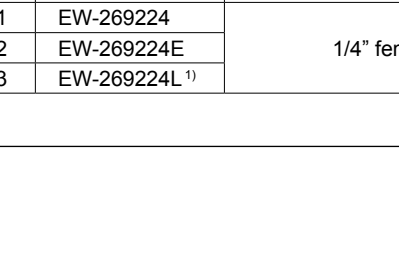
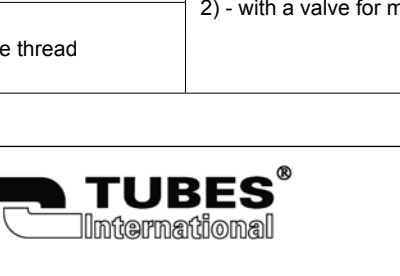
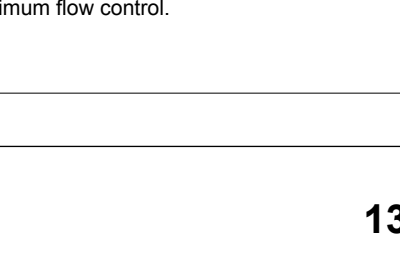





MACHINES AND ACCESSORIES - pneumatic accessories

EWO air blow guns

pic.	code	connection	description	
	EW-269530	DN 7.2 quick release coupling plug	<p>General purpose blow gun designed for the removal of all kinds of dirt: fluid, chips, shavings, etc., from any surface. The flow is adjusted with a lever. The blow gun is equipped with BLOWSTAR nozzle that reduces the noise level down to 74 dB at 6 bar pressure but blowing force remains unaltered. Maximum blowing force is 2.5 times higher than the force of STANDARD nozzle. Other nozzles can be also used - see „EWO blow gun accessories”.</p> <p>Material: anodised forged aluminium. Nozzle connection: M12x1.25 male thread. Working press.: from 2 bar up to 8 bar. Max. working press.: 10 bar. Working temp.: from -10°C up to +50°C. 1) - cast aluminium. 2) - with a valve for maximum flow control.</p>	
	EW-269530E ²⁾			6 mm hose tail
	EW-269530L ¹⁾			
	EW-269531	10 mm hose tail		
	EW-269531E ²⁾			
	EW-269531L ¹⁾			
	EW-269532	13 mm hose tail		
	EW-269532E ²⁾			
	EW-269532L ¹⁾			
	EW-269533	1/4" female thread		
	EW-269533E ²⁾			
	EW-269533L ¹⁾			
	EW-269430	1/4" female thread		
	EW-269430E			
	EW-269430L ¹⁾			

BLOWSTAR

pic.	code	connection	description	
	EW-269220	DN 7.2 quick release coupling plug	<p>General purpose blow gun designed for the removal of all kinds of dirt: fluid, chips, shavings, etc., from hard-to-reach areas. The flow is adjusted with a lever. The blow gun is equipped with a bent SAFETYSTAR nozzle, 110 mm long, made of nickel-plated steel. The noise level of the gun is reduced down to 80 dB. Other nozzles can be also used - see „EWO blow gun accessories”.</p> <p>Material: anodised forged aluminium. Nozzle connection: M12x1.25 male thread. Working press.: from 2 bar up to 8 bar. Max. working press.: 10 bar. Working temp.: from -10°C up to +50°C. 1) - cast aluminium. 2) - with a valve for maximum flow control.</p>	
	EW-269220E ²⁾			6 mm hose tail
	EW-269220L ¹⁾			
	EW-269221	10 mm hose tail		
	EW-269221E ²⁾			
	EW-269221L ¹⁾			
	EW-269222	13 mm hose tail		
	EW-269222E ²⁾			
	EW-269222L ¹⁾			
	EW-269223	1/4" female thread		
	EW-269223E ²⁾			
	EW-269223L ¹⁾			
	EW-269224	1/4" female thread		
	EW-269224E			
	EW-269224L ¹⁾			

SAFETYSTAR