


INDUSTRIAL FITTINGS - quick release couplings

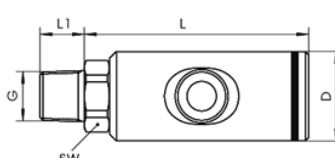
GROMELLE couplings - SAFELINE series

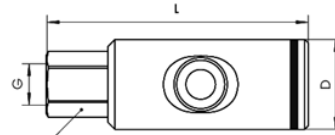


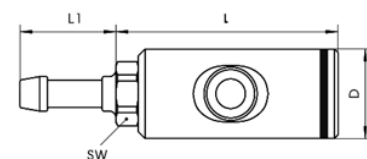
ISO 6150B type DN 5.5, DN 8

Flow rate: DN 5.5 - 700 l/min., DN 8 - 1590 l/min. at entrance pressure $P_e = 6 \text{ bar}$ ($\Delta p = 0.6 \text{ bar}$)
Working press.: 16 bar
Working temp.: From -20°C up to $+100^\circ\text{C}$

Material: The body of a socket - duralumin, connection - nickel-plated brass, push button - hardened steel, valve - zinc-plated steel, plug - zinc-plated steel, sealing - NBR.
Description: Compact and lightweight single shut-off coupling for air transfer. Equipped with button locking system, ensuring safe disconnection of a hose.
Interchangeable: All couplings with the design of a plug compliant with ISO 6150B and MIL C 4109 (DN 5.5, DN 8).

	code	full flow DN	thread size	SW [mm]	L [mm]	D [mm]	L1 [mm]
	GR-GD1053615	5.5	1/4" BSP	19	64	26	12
GR-GD1053614	5.5	1/4" BSPT	17	66	26	13	
GR-GD1053639	5.5	3/8" BSP	22	65	26	12	
GR-GD1053638	5.5	3/8" BSPT	17	66	26	15	
GR-GD1053613	5.5	1/2" BSP	27	67	26	14	
GR-GD1053612	5.5	1/2" BSPT	22	65	26	17	
GR-ID1096015	8	1/4" BSP	22	76	34	12	
GR-ID1096014	8	1/4" BSPT	22	76	34	13	
GR-ID1096039	8	3/8" BSP	22	76	34	12	
GR-ID1096038	8	3/8" BSPT	22	76	34	15	
GR-ID1096013	8	1/2" BSP	27	76	34	14	
GR-ID1096012	8	1/2" BSPT	22	76	34	17	

	code	full flow DN	thread size	SW [mm]	L [mm]	D [mm]	L1 [mm]
	GR-GD1052614	5.5	1/4" BSP	17	76	26	-
GR-GD1052638	5.5	3/8" BSP	22	81	26	-	
GR-GD1052612	5.5	1/2" BSP	27	83	26	-	
GR-ID1097014	8	1/4" BSP	22	88	34	-	
GR-ID1097038	8	3/8" BSP	22	91	34	-	
GR-ID1097012	8	1/2" BSP	27	94	34	-	

	code	full flow DN	hose I.D.	SW [mm]	L [mm]	D [mm]	L1 [mm]
	GR-GD1055667	5.5	6 mm	17	65	26	28
GR-GD1055678	5.5	7 mm	17	65	26	28	
GR-GD1055689	5.5	8 mm	17	65	26	28	
GR-GD1055690	5.5	9 mm	17	65	26	28	
GR-GD1055601	5.5	10 mm	17	65	26	28	
GR-ID1095678	8	7 mm	22	77	34	28	
GR-ID1095689	8	8 mm	22	77	34	28	
GR-ID1095690	8	9 mm	22	77	34	28	
GR-ID1095601	8	10 mm	22	77	34	28	