


INDUSTRIAL FITTINGS - couplings


GT swivel joints

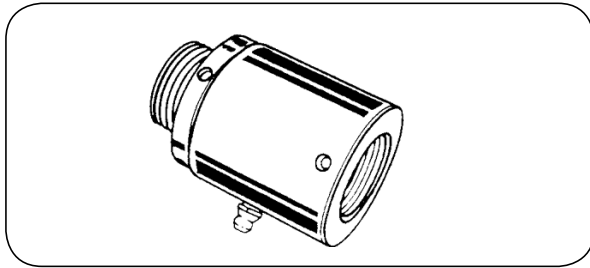

1000

Material: Nickel-plated steel, AISI 316L
Seal: PTFE
Working temp.: Up to +200°C
Thread: BSP female thread, BSP male thread
Rotation: Slow, swivelling

nickel-plated steel			AISI 316L		
code	thread size [inch]	working pressure [bar]	code	thread size [inch]	working pressure [bar]
GT-1013-K	1/4	50	GT-1013-I	1/4	20
GT-1017-K	3/8	50	GT-1017-I	3/8	20
GT-1021-K	1/2	50	GT-1021-I	1/2	20
GT-1027-K	3/4	50	GT-1027-I	3/4	20
GT-1034-K	1	30	GT-1034-I	1	15
GT-1042-K	1.1/4	30	GT-1042-I	1.1/4	15
GT-1049-K	1.1/2	30	GT-1049-I	1.1/2	15
GT-1060-K	2	20	GT-1060-I	2	10
GT-1076-K	2.1/2	20	GT-1076-I	2.1/2	10
GT-1090-K	3	20	GT-1090-I	3	10

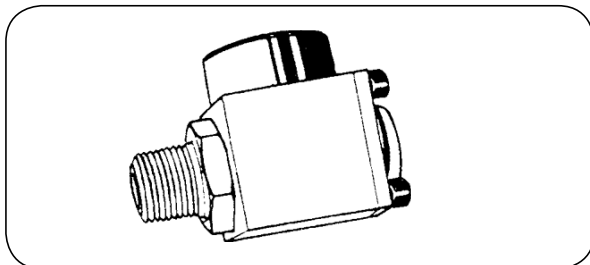

1200 SR

Material: Steel, nickel-plated steel, AISI 316L
Seal: NBR, Viton, PTFE
Working temp.: Up to +150°C (+120°C for AISI 316L)
Thread: BSP female thread, BSPT male thread
Rotation: Slow, swivelling

nickel-plated steel			AISI 316L		
code	thread size [inch]	working pressure [bar]	code	thread size [inch]	working pressure [bar]
GT-1213-SRK	1/4	350	GT-1213-SRI	1/4	175
GT-1217-SRK	3/8	350	GT-1217-SRI	3/8	175
GT-1221-SRK	1/2	300	GT-1221-SRI	1/2	150
GT-1227-SRK	3/4	300	GT-1227-SRI	3/4	150
GT-1234-SRK	1	250	GT-1234-SRI	1	125
GT-1242-SRK	1.1/4	250	GT-1242-SRI	1.1/4	125
GT-1249-SRK	1.1/2	200	GT-1249-SRI	1.1/2	100