


CLEANING AND WASHING - high pressure

Hoses for high pressure cleaning equipment

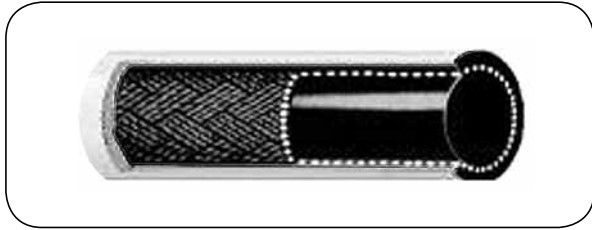


GAUNTLET 1500

Internal layer: Black NBR rubber
Reinforcement: One textile braid
External layer: Yellow Carbyn / NBR compound
Working temp.: From -30°C up to +93°C

Hose designed for hot water pressure cleaning equipment. External layer resistant to abrasion, oil, animal fat and poultry fat. High flexibility of the hose facilitates operation.

code	I.D. [mm]	O.D. [mm]	working pressure [bar]	bursting pressure [bar]	bending radius [mm]	weight [kg/m]
GY-GAUNTLET1500-06	6.4	15	103	410	65	0.16
GY-GAUNTLET1500-10	9.5	19.1	103	410	95	0.27
GY-GAUNTLET1500-13	12.7	21.3	83	330	125	0.29
GY-GAUNTLET1500-19	19.1	31.8	103	410	190	0.61

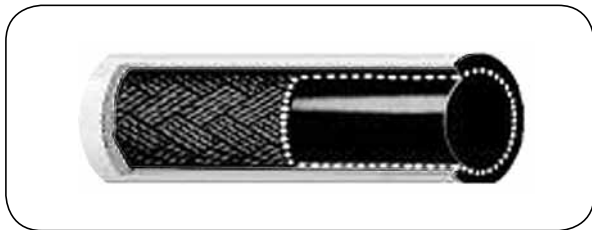


GAUNTLET 3000

Internal layer: Black NBR rubber
Reinforcement: One steel wire braid
External layer: Yellow Carbyn / NBR compound
Working temp.: From -30°C up to +120°C

Hose designed for hot water pressure cleaning equipment. External layer resistant to abrasion, oil, animal fat and poultry fat. High flexibility of the hose facilitates operation.

code	I.D. [mm]	O.D. [mm]	working pressure [bar]	bursting pressure [bar]	bending radius [mm]	weight [kg/m]
GY-GAUNTLET3000-10	9.5	17.5	206	824	100	0.36
GY-GAUNTLET3000-13	12.7	20.8	206	824	120	0.48

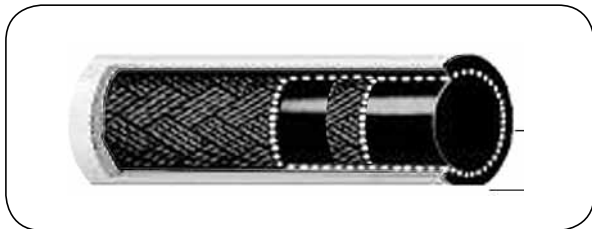

GAUNTLET 4500

Internal layer: Black NBR rubber
Reinforcement: Two steel wire braids
External layer: Yellow Carbyn / NBR compound
Working temp.: From -30°C up to +120°C

Hose designed for hot water pressure cleaning equipment. External layer resistant to abrasion, oil, animal fat and poultry fat. High flexibility of the hose facilitates operation.

code	I.D. [mm]	O.D. [mm]	working pressure [bar]	bursting pressure [bar]	bending radius [mm]	weight [kg/m]
GY-GAUNTLET4500-10	9.5	17.5	310	1240	-	0.40
GY-GAUNTLET4500-13	12.7	20.8	310	1240	-	0.51