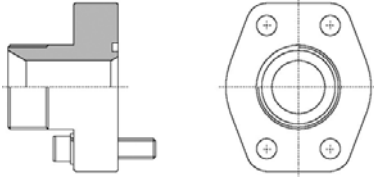
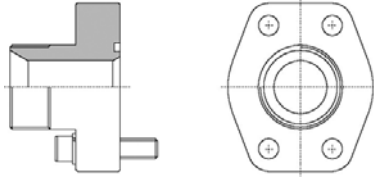
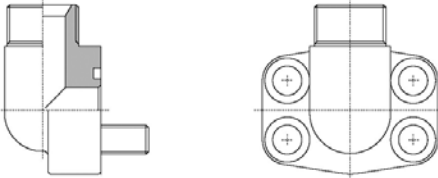



HIGH PRESSURE - adapters

SAE flange connectors

| SAE 3000 flange connector / BSP male thread 60° | | | | |
|---|---------------|-------------------------|--------------------|----------------|
|  | | | | |
| press. [bar] | code | flange dimension [inch] | thread size [inch] | bolt size [mm] |
| 348 | HK-C3-B-08-06 | 1/2 | 3/8 | 4 x M8 |
| | HK-C3-B-08-08 | | 1/2 | |
| | HK-C3-B-08-12 | | 3/4 | |
| | HK-C3-B-12-08 | 3/4 | 1/2 | 4 x M10 |
| | HK-C3-B-12-12 | | 3/4 | |
| | HK-C3-B-12-16 | | 1 | |
| | HK-C3-B-16-12 | 1 | 3/4 | 4 x M10 |
| | HK-C3-B-16-16 | | 1 | |
| HK-C3-B-16-20 | 1.1/4 | | | |
| 278 | HK-C3-B-20-16 | 1.1/4 | 1 | 4 x M14 |
| | HK-C3-B-20-20 | | 1.1/4 | |
| | HK-C3-B-20-24 | | 1.1/2 | |
| 210 | HK-C3-B-24-20 | 1.1/2 | 1.1/4 | 4 x M12 |
| | HK-C3-B-24-24 | | 1.1/2 | |
| | HK-C3-B-24-32 | 2 | 2 | |
| | HK-C3-B-32-24 | | 1.1/2 | |
| | HK-C3-B-32-32 | | 2 | |

| SAE 6000 flange connector / BSP male thread 60° | | | | |
|--|---------------|-------------------------|--------------------|----------------|
|  | | | | |
| press. [bar] | code | flange dimension [inch] | thread size [inch] | bolt size [mm] |
| 420 | HK-C6-B-08-06 | 1/2 | 3/8 | 4 x M8 |
| | HK-C6-B-08-08 | | 1/2 | |
| | HK-C6-B-08-12 | | 3/4 | |
| | HK-C6-B-12-08 | 3/4 | 1/2 | 4 x M10 |
| | HK-C6-B-12-12 | | 3/4 | |
| | HK-C6-B-12-16 | | 1 | |
| HK-C6-B-16-12 | 1 | 3/4 | 4 x M12 | |
| HK-C6-B-16-16 | | 1 | | |
| HK-C6-B-16-20 | | 1.1/4 | | |
| 420 | HK-C6-B-20-16 | 1.1/4 | 1 | 4 x M14 |
| | HK-C6-B-20-20 | | 1.1/4 | |
| | HK-C6-B-20-24 | | 1.1/2 | |
| | HK-C6-B-24-20 | | 1.1/4 | |
| 420 | HK-C6-B-24-24 | 1.1/2 | 1.1/4 | 4 x M16 |
| | HK-C6-B-24-24 | | 1.1/2 | |

| SAE 3000 90° flange connector / BSP male thread 60° | | | | |
|---|------------------|-------------------------|--------------------|----------------|
|  | | | | |
| press. [bar] | code | flange dimension [inch] | thread size [inch] | bolt size [mm] |
| 348 | HK-C3-B-90-08-06 | 1/2 | 3/8 | 4 x M8 |
| | HK-C3-B-90-08-08 | | 1/2 | |
| | HK-C3-B-90-08-12 | | 3/4 | |
| | HK-C3-B-90-12-08 | 3/4 | 1/2 | 4 x M10 |
| | HK-C3-B-90-12-12 | | 3/4 | |
| | HK-C3-B-90-12-16 | | 1 | |
| | HK-C3-B-90-16-12 | 1 | 3/4 | 4 x M10 |
| | HK-C3-B-90-16-16 | | 1 | |
| HK-C3-B-90-16-20 | 1.1/4 | | | |
| 278 | HK-C3-B-90-20-16 | 1.1/4 | 1 | 4 x M14 |
| | HK-C3-B-90-20-20 | | 1.1/4 | |
| | HK-C3-B-90-20-24 | | 1.1/2 | |
| 210 | HK-C3-B-90-24-20 | 1.1/2 | 1.1/4 | 4 x M12 |
| | HK-C3-B-90-24-24 | | 1.1/2 | |
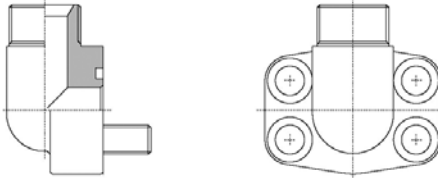
| SAE 6000 90° flange connector / BSP male thread 60° | | | | |
|--|------------------|-------------------------|--------------------|----------------|
|  | | | | |
| press. [bar] | code | flange dimension [inch] | thread size [inch] | bolt size [mm] |
| 420 | HK-C6-B-90-08-06 | 1/2 | 3/8 | 4 x M8 |
| | HK-C6-B-90-08-08 | | 1/2 | |
| | HK-C6-B-90-08-12 | | 3/4 | |
| | HK-C6-B-90-12-08 | 3/4 | 1/2 | 4 x M10 |
| | HK-C6-B-90-12-12 | | 3/4 | |
| | HK-C6-B-90-12-16 | | 1 | |
| HK-C6-B-90-16-12 | 1 | 3/4 | 4 x M12 | |
| HK-C6-B-90-16-16 | | 1 | | |
| HK-C6-B-90-16-20 | | 1.1/4 | | |
| 420 | HK-C6-B-90-20-16 | 1.1/4 | 1 | 4 x M14 |
| | HK-C6-B-90-20-20 | | 1.1/4 | |
| | HK-C6-B-90-20-24 | | 1.1/2 | |
| | HK-C6-B-90-24-20 | | 1.1/4 | |
| 420 | HK-C6-B-90-24-24 | 1.1/2 | 1.1/4 | 4 x M16 |
| | HK-C6-B-90-24-24 | | 1.1/2 | |