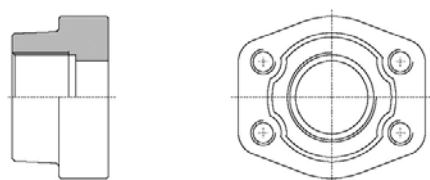
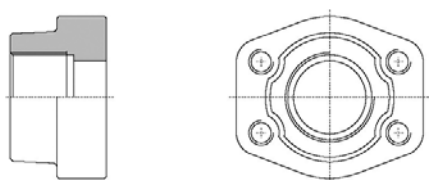
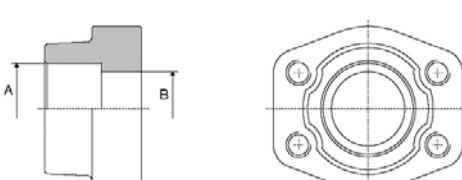



# HIGH PRESSURE - adapters

## SAE flange connectors

SAE 3000 counterflange / BSP female thread				
				
press. [bar]	code	flange dimension [inch]	thread size [inch]	bolt hole thread [mm]
348	HK-D3-BX-08-06	1/2	3/8	M8
	HK-D3-BX-08-08		1/2	
	HK-D3-BX-12-12	3/4	3/4	M10
	HK-D3-BX-16-16	1	1	
278	HK-D3-BX-20-20	1.1/4	1.1/4	M12
210	HK-D3-BX-24-24	1.1/2	1.1/2	
	HK-D3-BX-32-32	2	2	
175	HK-D3-BX-40-40	2.1/2	2.1/2	M16
138	HK-D3-BX-48-48	3	3	
35	HK-D3-BX-56-56	3.1/2	3.1/2	M16
	HK-D3-BX-64-64	4	4	
	HK-D3-BX-80-80	5	5	

SAE 6000 counterflange / BSP female thread				
				
press. [bar]	code	flange dimension [inch]	thread size [inch]	bolt hole thread [mm]
420	HK-D6-BX-08-06	1/2	3/8	M8
	HK-D6-BX-08-08		1/2	
	HK-D6-BX-12-12	3/4	3/4	M10
	HK-D6-BX-16-16	1	1	M12
420	HK-D6-BX-20-20	1.1/4	1.1/4	M14
	HK-D6-BX-24-24	1.1/2	1.1/2	M16
420	HK-D6-BX-32-32	2	2	M20
	HK-D6-BX-40-40	2.1/2	2.1/2	M24
420	HK-D6-BX-48-48	3	3	M30

SAE 3000 counterflange with butt weld connection					
					
press. [bar]	code	flange dimension [inch]	dimension A [mm]	dimension B [mm]	bolt hole thread [mm]
348	HK-D3-SAX-06	3/8	17.5	13	M8
	HK-D3-SAX-08	1/2	21.6	13	
	HK-D3-SAX-12	3/4	27.2	19	M10
	HK-D3-SAX-16	1	34.1	25	
278	HK-D3-SAX-20	1.1/4	42.8	31	M12
210	HK-D3-SAX-24	1.1/2	48.6	38	
	HK-D3-SAX-32	2	61	50	
175	HK-D3-SAX-40	2.1/2	76.6	63	M16
138	HK-D3-SAX-48	3	90.5	73	
35	HK-D3-SAX-56	3.1/2	103	89	M16
	HK-D3-SAX-64	4	115.3	99	
	HK-D3-SAX-80	5	142	120	

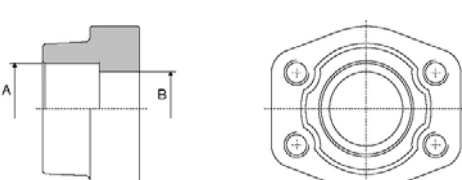SAE 6000 counterflange with butt weld connection					
					
press. [bar]	code	flange dimension [inch]	dimension A [mm]	dimension B [mm]	bolt hole thread [mm]
420	HK-D6-SAX-06	3/8	17.5	13	M8
	HK-D6-SAX-08	1/2	21.6	13	
	HK-D6-SAX-12	3/4	27.2	19	M10
	HK-D6-SAX-16	1	34.1	25	M12
420	HK-D6-SAX-20	1.1/4	42.8	31	M14
	HK-D6-SAX-24	1.1/2	48.6	38	M16
420	HK-D6-SAX-32	2	61	50	M20
	HK-D6-SAX-40	2.1/2	76.6	63	M24
420	HK-D6-SAX-48	3	90.5	73	M30