


INDUSTRIAL FITTINGS - couplings

API ring gaskets

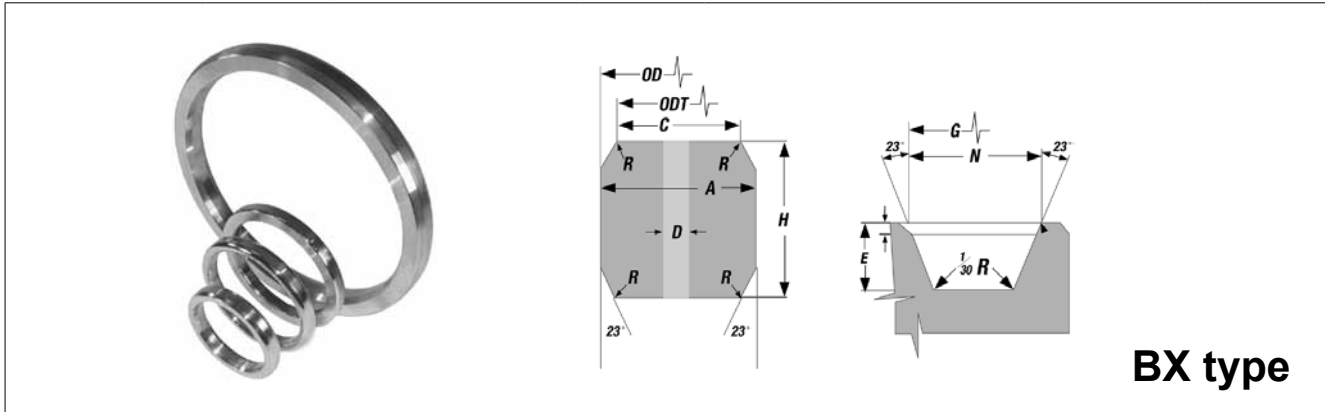

code	dimensions [inch]								
	OD	H	A	ODT	C	D	E	G	N
HL-BX-150	2.842	0.366	0.366	2.790	0.314	0.06	0.22	2.893	0.450
HL-BX-151	3.008	0.379	0.379	2.954	0.325	0.06	0.22	30.62	0.466
HL-BX-152	3.334	0.403	0.403	3.277	0.346	0.06	0.23	3.395	0.498
HL-BX-153	3.974	0.448	0.448	3.910	0.385	0.06	0.27	4.046	0.554
HL-BX-154	4.600	0.488	0.488	4.531	0.419	0.06	0.30	4.685	0.606
HL-BX-155	5.825	0.560	0.560	5.746	0.481	0.06	0.33	5.930	0.698
HL-BX-156	9.367	0.733	0.733	9.263	0.629	0.12	0.44	9.521	0.921
HL-BX-157	11.593	0.826	0.826	11.476	0.709	0.12	0.50	11.774	1.039
HL-BX-158	13.860	0.911	0.911	13.731	0.782	0.12	0.56	14.064	1.149
HL-BX-159	16.800	1.012	1.012	16.657	0.869	0.12	0.62	17.033	1.279
HL-BX-160	15.850	0.938	0.541	15.717	0.408	0.12	0.56	16.063	0.786
HL-BX-161	19.347	1.105	0.638	19.191	0.482	0.12	0.67	19.604	0.930
HL-BX-162	18.720	0.560	0.560	18.641	0.481	0.06	0.33	18.832	0.705
HL-BX-163	21.896	1.185	0.684	21.728	0.516	0.12	0.72	22.185	1.006
HL-BX-164	22.463	1.185	0.968	22.295	0.800	0.12	0.72	22.752	1.290
HL-BX-165	24.595	1.261	0.728	24.417	0.550	0.12	0.75	24.904	1.071
HL-BX-166	25.198	1.261	1.029	25.020	0.851	0.12	0.75	25.507	1.373
HL-BX-167	29.896	1.412	0.516	29.696	0.316	0.06	0.84	30.249	0.902
HL-BX-168	30.128	1.412	0.632	29.928	0.432	0.06	0.84	30.481	1.018
HL-BX-169	6.831	0.624	0.509	6.743	0.421	0.06	0.38	6.955	0.666
HL-BX-170	8.584	0.560	0.560	8.505	0.481	0.06	0.33	8.696	0.705
HL-BX-171	10.529	0.560	0.560	10.450	0.481	0.06	0.33	10.641	0.705
HL-BX-172	13.113	0.560	0.560	13.034	0.481	0.06	0.33	13.225	0.705
HL-BX-303	33.573	1.494	0.668	33.361	0.457	0.06	0.89	33.949	1.078

BX type sealing ring can only be used for flanges and grooves of API BX type. BX model has an opening allowing for pressure balance. Working pressure up to 1500 bar. Working temperature (carbon steel) from -40°C up to +500°C.