Hydraulic actuators type SE

Type SE 25, SE 30, SE 40

Single-acting plunger actuators

Max. working pressure: 180 bar
Working temperature: -30 to +110°C
Medium: hydraulic oil
Material: carbon steel and cast iron (gland)
Seal: PU, NBR
Protective coating: no coating, chromed plunger

Single-acting plunger actuators with a bolt-on gland, designed for power hydraulics systems. Depending on the application, select the load capacity (in kG/100 bar) and the actuator stroke LC. Seal kits available on request.

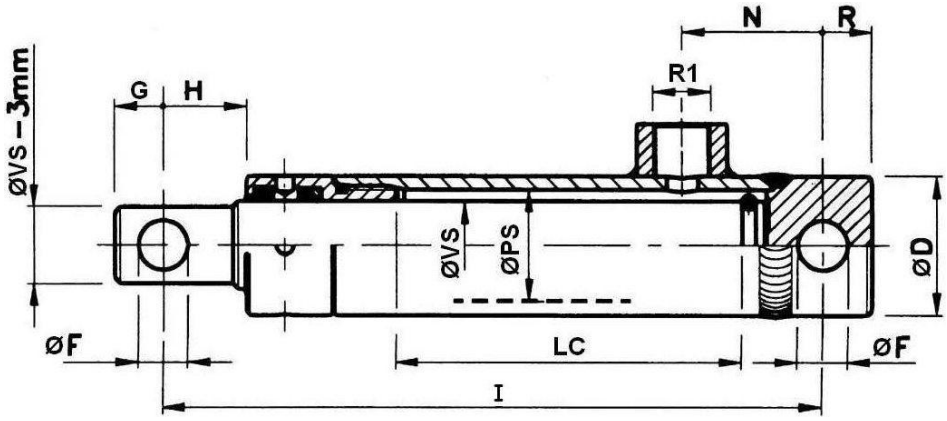

index	ØVS [mm]	ØPS [mm]	ØD [mm]	ØF [mm]	R [mm]	R1 [BSP]	G [mm]	H [mm]	N [mm]	LC [mm]	I [mm]	kG / 100 bar	weight [kg]
Type SE 25													
HS-SE25100	25	32	40	14,2	14	1/4”	14	26	40	100	190	490	1,5
HS-SE25150										150	240		2,0
HS-SE25200										200	290		2,5
HS-SE25250										250	340		2,8
HS-SE25300										300	390		3,2
Type SE 30													
HS-SE30150	30	40	50	16,2	15	3/8”	16	26	44	150	250	706	3,0
HS-SE30200										200	300		3,8
HS-SE30250										250	350		4,4
HS-SE30300										300	400		5,0
HS-SE30350										350	450		5,5
HS-SE30400										400	500		6,0
HS-SE30450										450	550		6,5
HS-SE30550										550	650		7,5
HS-SE30700										700	800		9,0
Type SE 40													
HS-SE40200	40	50	60	23,2	22	3/8”	22	32	48	200	330	1250	6,0
HS-SE40250										250	380		6,5
HS-SE40300										300	430		7,9
HS-SE40350										350	480		8,7
HS-SE40400										400	530		9,3
HS-SE40450										450	580		10,5
HS-SE40500										500	630		11,0
HS-SE40550										550	680		12,5
HS-SE40600										600	730		12,8
HS-SE40700										700	830		14,0