


INDUSTRIAL FITTINGS - valves

Ball valves

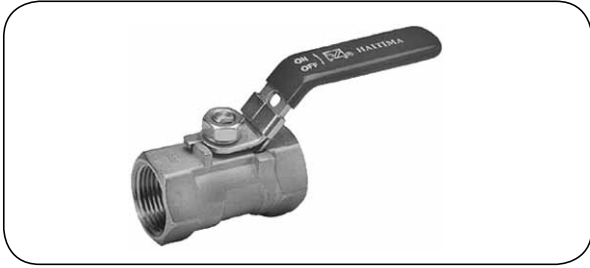

Ball valve 2017K type

Body material: AISI 316 steel
Ball material: AISI 316 steel
Handle material: AISI 304 steel
Ball seal: PTFE/RTFE
Stem seal: PTFE
Connection: BSP female thread
Working temp.: From -20°C up to +200°C

A general purpose ball valve designed for industrial applications. Used for air, gases, water, steam, chemicals, petrochemical products, etc. Working pressure depends on working temperature.

code	DN [mm]	length [mm]	thread size [inch]	working pressure [bar]
HT-2017K-08	8	39	1/4	63
HT-2017K-10	10	44	3/8	63
HT-2017K-15	15	55	1/2	63
HT-2017K-20	20	59	3/4	63
HT-2017K-25	25	69	1	63
HT-2017K-32	32	77	1.1/4	63
HT-2017K-40	40	81	1.1/2	63
HT-2017K-50	50	97	2	63



Ball valve 2006SC / SM3 type

Body material: AISI 316 steel
Ball material: AISI 316 steel
Handle material: AISI 304 steel
Ball seal: PTFE/RTFE
Stem seal: PTFE
Connection: BSP female thread
Working temp.: From -20°C up to +200°C

A general purpose ball valve designed for industrial installations. Used for air, gases, water, steam, chemicals, petrochemical products, etc. Working pressure depends on working temperature.

code	DN [mm]	length [mm]	thread size [inch]	working pressure [bar]
HT-2006SC-08	8	50	1/4	63
HT-2006SC-10	10	50	3/8	63
HT-2006SC-15	15	59	1/2	63
HT-2006SC-20	20	66	3/4	63
HT-2006SC-25	25	75.5	1	63
HT-2006SC-32	32	88.7	1.1/4	63
HT-2006SC-40	40	98.5	1.1/2	63
HT-2006SC-50	50	120.6	2	63
HT-2006SC-65	65	146.5	2.1/2	63
HT-2006SC-80	80	167.5	3	63
HT-2006SM3-100	100	240	4	63