


CLEANING AND WASHING - high pressure

Hoses for high pressure cleaning equipment

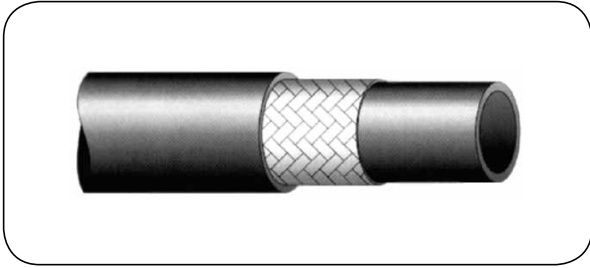

HYDROWASH / 1


Internal layer: Black synthetic rubber
Reinforcement: One steel wire braid
External layer: Black or blue synthetic rubber (pinpricked)
Working temp.: From -40°C up to +150°C

Hose designed for hot water pressure cleaning equipment. Internal layer resistant to detergents, external layer to abrasion, oil, ozone and weather conditions.
 Assembly - use Z type fittings (non-skived).

code	I.D. [mm]	O.D. [mm]	working pressure [bar]	bursting pressure [bar]	bending radius [mm]	weight [kg/m]
HW-HWASH1T-06	6.4	13.2	250	1000	100	0.22
HW-HWASH1T-08	8	14.8	250	1000	115	0.26
HW-HWASH1T-10	9.5	17.2	250	1000	130	0.34
HW-HWASH1T-12	12.7	20.4	250	1000	180	0.41

Code example:

- black hose: HW-HWASH1T-06BK
- blue hose: HW-HWASH1T-06BL

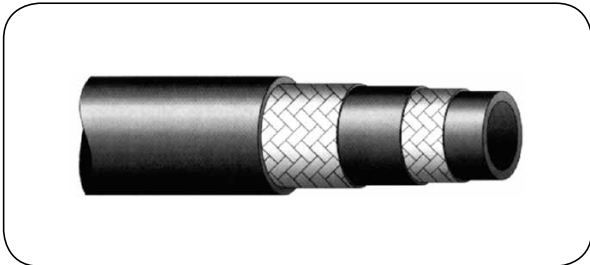

HYDROWASH / 2

Internal layer: Black synthetic rubber
Reinforcement: Two steel wire braids
External layer: Black or blue synthetic rubber (pinpricked)
Working temp.: From -40°C up to +150°C

Hose designed for hot water pressure cleaning equipment. Internal layer resistant to detergents, external layer to abrasion, oil, ozone and weather conditions.
 Assembly - use Z type fittings (non-skived).

code	I.D. [mm]	O.D. [mm]	working pressure [bar]	bursting pressure [bar]	bending radius [mm]	weight [kg/m]
HW-HWASH2T-06	6.4	15	400	1600	100	0.38
HW-HWASH2T-08	8	16.5	400	1600	115	0.44
HW-HWASH2T-10	9.5	18.9	400	1600	130	0.55
HW-HWASH2T-12	12.7	22.2	400	1600	180	0.64

Code example:

- black hose: HW-HWASH2T-06BK
- blue hose: HW-HWASH2T-06BL