

Hose cutting machines



FP-CM75PH

FINN-POWER CM75 PH


CM 75 PH machine is designed to cut hydraulic hoses with 1, 2 or 4 braids of up to 2" in diameter.

Used for series production of hydraulic hose assemblies.

- maximum hose outside diameter: 80 mm,
- operated by three-phase 7.5 kW motor,
- speed of revolutions: 2840 r.p.m.,
- standard cutting blade: Ø 520x4x38 mm - toothed blade (smooth blade can be used as well),
- hose is pneumatically pushed against the blade,
- adjustable cutting speed,
- weight: 270 kg.

A measuring scale table to measure hose length (2 meter long or with extension module - 4 m) and a fume extractor can be installed as additional equipment.

code	description
FP-CM75PH/S	table to measure hose length
FP-CM75PH/W	fume extractor

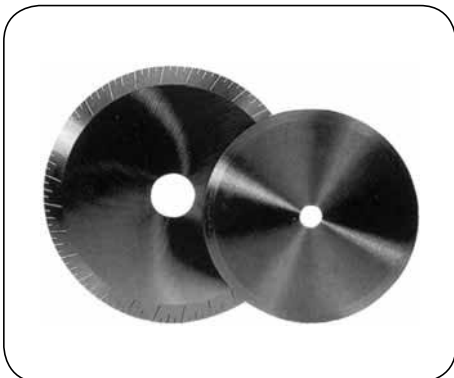

Cutting blades

Blades made of hardened steel. Two types of cutting blades available:

- standard (smooth),
- toothed.

The toothed blades enable to cut at higher cutting speed, extremely suitable for 4 and 6 braid hoses.

code	description
HY-9002-00-02	standard blade 200x3x40 mm
HY-9001-00-92	standard blade 250x3x16 mm
HY-9001-00-02	standard blade 250x3x25 mm
HY-9006-06-01	standard blade 250x3x25.4 mm
HY-9006-00-01	standard blade 250x3x32 mm
HY-9003-00-01	standard blade 300x3x16 mm
HY-9003-00-04	standard blade 300x3x50 mm
HY-9009-01-04	standard blade 400x4x50 mm
FP-055201	standard blade 520x4x38 mm

code	description
HY-9006-01-02	toothed blade TS 250x3x40 mm
HY-9003-01-02	toothed blade TS 300x3x50 mm
HY-9009-01-02	toothed blade TS 400x3x50 mm
HY-9005-00-04	toothed blade TS 520x3x50 mm
FP-12251	toothed blade TF 520x4x38 mm

code	description
HY-9006-01-05	adapter - ring 40x25.4 mm
HY-9006-01-06	adapter - ring 40x32 mm
HY-9005-01-07	adapter - ring 50x32 mm
HY-9005-01-04	adapter - ring 50x38 mm
HY-9005-01-05	adapter - ring 50x40 mm