



NK-20SM-B	NK-20SM-S	NK-20SM-SS	1/4"	55,5	26,5[1]	19	7	13
NK-30SM-B	NK-30SM-S	NK-30SM-SS	3/8"	56,5		19	8[3]	14
NK-40SM-B	NK-40SM-S	NK-40SM-SS	1/2"	59,5		23[2]	9	16
NK-400SM-B	NK-400SM-S	NK-400SM-SS	1/2"	63	35	29	13	16
NK-600SM-B	NK-600SM-S	NK-600SM-SS	3/4"	67		32	16	19
NK-800SM-B	NK-800SM-S	NK-800SM-SS	1"	72		36	16	22

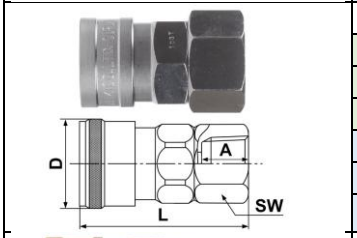

Socket with valve with BSPT female thread								
NK-20SF-B	NK-20SF-S	NK-20SF-SS	1/4"	49,5	26,5[1]	19	-	13
NK-30SF-B	NK-30SF-S	NK-30SF-SS	3/8"	50,5		21	-	14
NK-40SF-B	NK-40SF-S	NK-40SF-SS	1/2"	52,5		29	-	15
NK-400SF-B	NK-400SF-S	NK-400SF-SS	1/2"	57	35	29	-	15
NK-600SF-B	NK-600SF-S	NK-600SF-SS	3/4"	61		35	-	17
NK-800SF-B	NK-800SF-S	NK-800SF-SS	1"	68		41	-	22

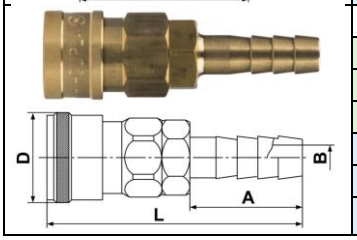

Socket with valve with hose tail								
NK-20SH-B	NK-20SH-S	NK-20SH-SS	hose 1/4"	72,5	26,5[1]	-	5	30
NK-30SH-B	NK-30SH-S	NK-30SH-SS	hose 3/8"	76,5		-	7,5	34
NK-40SH-B	NK-40SH-S	NK-40SH-SS	hose 1/2"	78,5		-	9	36
NK-400SH-B	NK-400SH-S	NK-400SH-SS	hose 1/2"	83	35	-	9	36
NK-600SH-B	NK-600SH-S	NK-600SH-SS	hose 3/4"	92		-	14	45
NK-800SH-B	NK-800SH-S	NK-800SH-SS	hose 1"	102		-	16	55

[1] - for brass and stainless steel: D = 25.4 mm
[2] - for brass and stainless steel: SW = 22 mm
[3] - for brass and stainless steel: B = 9 mm

LINE CUPLA - HI CUPLA series air manifolds

NK-200L



NK-200S



index	connections		description
	inlet (adaptor)	outlet (sockets)	
NK-200L	1/2" (NK-400PM-S)	1 x 1/2" (NK-40SM-S) 4 x 1/4" (NK-20SM-S)	Manifolds with HI CUPLA quick couplings for air (chrome steel version with caps) Body material: aluminium Seal: NBR Working pressure: 15 bar Working temperature: from -20°C to +60°C
NK-200S	1/2" (NK-400PM-S)	1 x 1/2" (NK-40SM-S) 4 x 1/4" (NK-20SM-S)	

SUPER NOBELAIR SOFT DN10 hose with a stainless steel NITTO KOHKI HI CUPLA (NK-30SH-SS) quick coupling socket fitted using a stainless steel EAR CLIP-W insert ring. The insert ring clamps well and protects the hose surface.

