



# INDUSTRIAL FITTINGS - quick release couplings

## NiTO 1/2" - 3/4" - 1" system - couplings for water



**Material:** Chromium plated brass  
**Working press.:** Up to 25 bar  
**Working temp.:** Up to +80°C  
**Sealing:** NBR - cannot be used with fuel and oil (option - Viton).  
 For valve O-ring made of EPDM.

High quality quick release water couplings for industrial use. Available with a wide array of diameter combinations of hoses and threads, versions with free flow, valve, check valve, etc. Manufactured in three systems: 1/2" and 3/4" and 1" with flow diameters (A): 1/2" (10 mm), 3/4" (15 mm) and 1" (20 mm). Elements of different systems are not interchangeable, e.g. 1/2" socket and 3/4" plug cannot be connected.

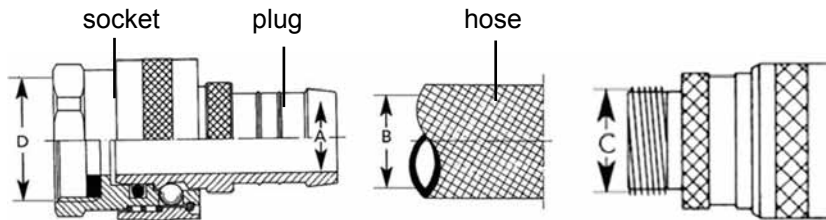

| picture | description   | 1/2" SYSTEM |                                 | 3/4" SYSTEM |                 | 1" SYSTEM  |      |
|---------|---|-------------|---------------------------------|-------------|-----------------|------------|------|
|         |   | code        | size                            | code        | size            | code       | size |
|         | Socket with female thread (D)<br>+ plug with hose tail (B). | NT-53506A3  | D-1/2" x B-1/2"                 | NT-63506A3  | D-3/4" x B-3/4" | X          | X    |
|         |   | NT-535G6A3  | D-1/2", 3/4", M22x1<br>x B-1/2" |             |                 |            |      |
|         | Socket with female thread (D).                              | NT-53500A3  | D-1/2"                          | NT-63500A3  | D-3/4"          | NT-73500A3 | D-1" |
|         |   | NT-53520A3  | D-3/4"                          |             |                 |            |      |
|         |   | NT-5352GA3  | D-1/2", 3/4", M22x1             |             |                 |            |      |
|         | Socket with hose tail (B).                                  | NT-5349SA3  | B-3/8"                          | NT-6350SA3  | B-3/4"          | X          | X    |
|         |   | NT-5350SA3  | B-1/2"                          |             |                 |            |      |
|         |   | NT-5350CA5  | B-5/8"                          | NT-6350MA3  | B-5/8"          |            |      |
|         |   | NT-5351SA3  | B-3/4"                          |             |                 |            |      |
|         | Socket with female thread (D)<br>and shut-off valve.        | NT-53530A3  | D-3/4"                          | NT-63530A3  | D-3/4"          | NT-73530A3 | D-1" |
|         |   | NT-5353GA3  | D-1/2", 3/4", M22x1             |             |                 |            |      |
|         |   | NT-5353RA3  | D-1/2", 3/4"                    |             |                 |            |      |
|         | Socket with male thread (C).                                | NT-5350NA3  | C-1/2"                          | X           | X               | X          | X    |
|         |   | NT-5352NA3  | C-3/4"                          |             |                 |            |      |
|         |   | NT-5353NA3  | C-1/2" (with valve)             |             |                 |            |      |