RECTUS quick couplings – 20KA / 20KB DN2.7 series (2)

socket	index	version	connection A	SW [mm]	L [mm]	D [mm]	L1 [mm]	L2 [mm]
	RE-20KAAM05MPX	with male thread, with valve, **single shut-off**	GZ M5	9	26	10	5	-
	RE-20KAAW10MPX		GZ BSP 1/8”	11	28	10	7	-
	RE-20KAIM05MPX	with male female, with valve, **single shut-off**	GW M5	9	26	10	5	-
	RE-20KAIW10MPX		GW BSP 1/8”	12	28	10	7	-
	RE-20KATF03MPX	with end for hose, with valve, **single shut-off**	3 mm	-	35	10	13	-
	RE-20KATF04MPX		4 mm	-	35	10	13	-
	RE-20KATF05MPX		5 mm	-	34	10	13	-
	RE-20KATS03MPX	with tail for hose, bulkhead, with valve, **single shut-off**	3 mm	12	51	10	13	17
	RE-20KATS04MPX		4 mm	12	51	10	13	17
	RE-20KATS06MPX		6 mm	12	51	10	13	17
	RE-20KAKO04MPX	with tail for hose plastic, with valve, **single shut-off**	3x4 mm	9	34	10	7	5
	RE-20KAKO05MPX		3x5 mm	9	34	10	7	5
	RE-20KAKO06MPX		4x6 mm	9	34	10	7	5

plug	index	version	connection A	SW [mm]	L [mm]	D [mm]	L1 [mm]	L2 [mm]
	RE-20SBAM05MPX	with male thread, with valve, **two-way shut-off**	GZ M5	9	28	-	5	-
	RE-20SBAW10MPX		GZ BSP 1/8”	11	30	-	7	-
	RE-20SBIM05MPX	with male female, with valve, **two-way shut-off**	GW M5	9	26	-	5	-
	RE-20SBIW10MPX		GW BSP 1/8”	12	30	-	7	-
	RE-20SBTF04MPX	with end for hose, with valve, **two-way shut-off**	4 mm	8	36	-	13	-
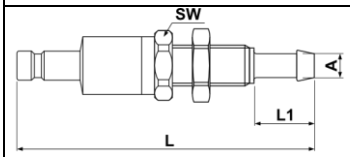	RE-20SBTS03MPX	with tail for hose, bulkhead, with valve, **two-way shut-off**	3 mm	12	52,5	-	13	17
	RE-20SBTS04MPX		4 mm	12	52,5	-	13	17
	RE-20SBKO04MPX	with end for hose plastic, with valve, **two-way shut-off**	3x4 mm	9	30,5	-	7	5
	RE-20SBKO05MPX		3x5 mm	9	30,5	-	7	5
	RE-20SBKO06MPX		4x6 mm	9	30,5	-	7	5