


# MACHINES AND ACCESSORIES - protection and sealing

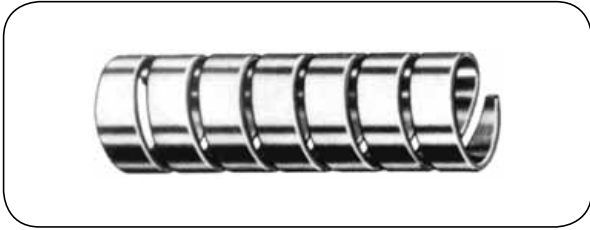


## FLAT G

**Material:** Galvanized steel

Protective spiral made of steel band designed to protect hoses (cables) against abrasion, kinking and crushing.

code	I.D. [mm]	band thickness [mm]	band width [mm]	distance between coils [mm]	standard length [m]
RF-GFLAT-16	16	1	5	3	4
RF-GFLAT-18	18	1	5	3	4
RF-GFLAT-20	20	1	5	3	4
RF-GFLAT-22	22	1	5	3	4
RF-GFLAT-24	24	1	5	3	4
RF-GFLAT-26	26	1	5	3	4
RF-GFLAT-28	28	1	5	3	4
RF-GFLAT-30	30	1	5	3	4
RF-GFLAT-32	32	1	5	3	4
RF-GFLAT-34	34	1	5	3	4
RF-GFLAT-38	38	1	5	3	4
RF-GFLAT-40	40	1	5	3	4
RF-GFLAT-42	42	1	5	3	4
RF-GFLAT-47	47	1	5	3	4
RF-GFLAT-52	52	1	5	3	2
RF-GFLAT-60	60	1	5	3	2
RF-GFLAT-68	68	1	5	3	1
RF-GFLAT-72	72	1	5	3	1

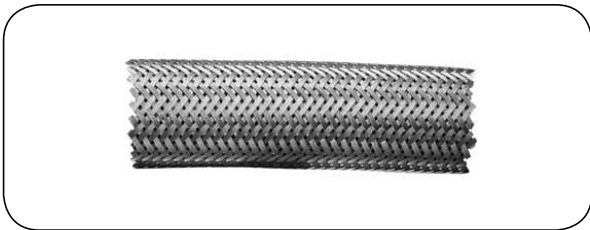

## 304 B

**Material:** AISI 304 steel

**Type:** Standard

Steel braids are used as an external hose shield in order to protect hoses against mechanical damage, abrasion, etc. They can be clamped with clamping bands or ferrules.

code	hose I.D. [inch]	braid I.D. [mm]
AT-304B-010	3/8	16.5
AT-304B-012	1/2	21.5
AT-304B-020	3/4	28.5
AT-304B-025	1	36
AT-304B-032	1.1/4	43.5
AT-304B-040	1.1/2	53
AT-304B-050	2	67.5
AT-304B-065	2.1/2	81
AT-304B-080	3	96
AT-304B-100	4	-
AT-304B-125	5	-
AT-304B-150	6	-
AT-304BB-200	8	-
AT-304BB-250	10	-