


## MACHINES AND ACCESSORIES - protection and sealing

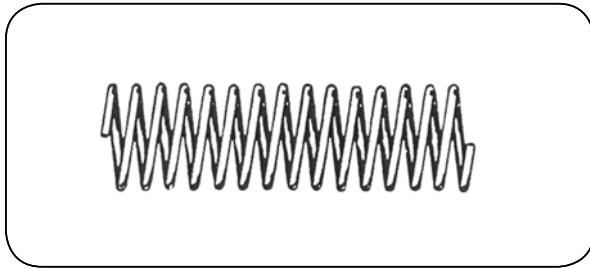

### SPRING

**Material:** Galvanized spring steel

Protective spiral made of steel wire designed to protect hoses (cables) against abrasion, kinking and crushing. Standard length 5 m.

code	I.D. [mm]	distance between coils [mm]	wire diameter [mm]
RF-SPRING-10	10	5	1.6
RF-SPRING-12	12	5	1.6
RF-SPRING-14	14	5	1.6
RF-SPRING-15	15	5	1.6
RF-SPRING-17	17	5	1.6
RF-SPRING-19	19	5	1.6
RF-SPRING-20	20	5	1.6
RF-SPRING-22	22	6	2
RF-SPRING-24	24	6	2
RF-SPRING-25	25	6	2
RF-SPRING-27	27	6	2
RF-SPRING-29	29	6	2
RF-SPRING-30	30	6	2
RF-SPRING-33	33	10	3
RF-SPRING-34	34	10	3
RF-SPRING-37	37	10	3
RF-SPRING-40	40	10	3
RF-SPRING-42	42	10	3
RF-SPRING-46	46	10	3
RF-SPRING-48	48	10	3
RF-SPRING-50	50	10	3

