
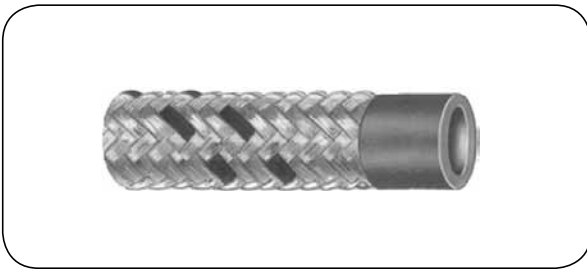




INDUSTRIAL HOSES - air and water

Sanitary hoses and hose assemblies

Sanitary hoses and hose assemblies are suitable for hot and cold water installations. They are used for direct connection of sanitary bathroom fittings and kitchen fittings but also air-conditioning and central heating installations. Come either without fittings, in inner diameters ranging from 10 mm to 50 mm, or as complete hose assemblies with threaded fittings (3/8", 1/2" and 3/4") and inner diameters of 8 mm and 12 mm. Hoses with other types of connectors (female thread angular connectors, M10 faucet connectors, compression fittings) and of other lengths (from 100 mm to 2500 mm) are available on request. The hose assemblies obtained a technical approval by ITB (ITB - Building Research Institute) and hygiene approval.



ZINCOFLEX - C

Internal layer: Non-toxic EPDM rubber

Reinforcement: Galvanized steel braid

Working temp.: From -10°C up to +100°C

Hose designed for water and non-corrosive fluids. Widely used in sanitary systems, boilers and cooling systems. Two red stripes in the braid of the hose indicate the resistance to high fluid temperature.

code	I.D. [mm]	O.D. [mm]	working pressure [bar]	bursting pressure [bar]	bending radius [mm]	standard length [m]
RK-ZCF-C-10	10	13.2	15	60	40	50
RK-ZCF-C-13	13	18	15	60	60	50
RK-ZCF-C-19	19	25	10	40	80	50
RK-ZCF-C-25	25	32	10	40	100	50
RK-ZCF-C-32	32	41	10	40	160	50
RK-ZCF-C-40	40	51	6	24	180	50
RK-ZCF-C-50	50	62	6	24	230	50