




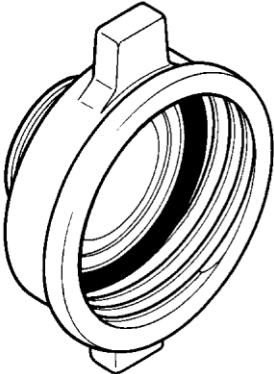


# INDUSTRIAL FITTINGS - couplings

## Threaded couplings - RS adapters

picture	code	female thread	male thread	material	seal	weight [kg]	pic.
	RS-500250200112	2.1/2" BSP	2" BSP	SS	flat	0.44	1
	RS-500250200113			Ms	flat	0.53	2
	RS-500250250113		2.1/2" BSP	Ms	flat	0.64	1
	RS-500250300112		3" BSP	SS	flat	0.50	1
	RS-500250300113			Ms	flat	0.48	3
	RS-500300200112	3" BSP	2" BSP	SS	flat	0.53	1
	RS-500300200113			Ms	flat	0.85	3
	RS-500300250112		2.1/2" BSP	SS	flat	0.56	1
	RS-500300250113			Ms	flat	0.82	3
	RS-500300300113	3" BSP	3" BSP	Ms	flat	0.78	3
	RS-500300300133		3" NPT	Ms	flat/thread	0.87	1
	RS-500300400112		4" BSP	SS	flat	1.05	1
	RS-500300400113			Ms	flat	0.98	3
	RS-510300400113			Ms	flat	0.93	4
			RS-500300550152	5.1/2" DIN 11	5.1/2" DIN 11	SS	flat
RS-500300550153		Ms	flat			2.50	1
RS-500300550154		Al	flat			0.89	1
	RS-500300300313	3" NPT	3" BSP	Ms	thread/flat	0.96	1
	RS-500400300112	4" BSP	3" BSP	SS	flat	0.93	1
	RS-500400300113			Ms	flat	1.15	2
	RS-500400400113		G 4"	Ms	flat	1.60	1
	RS-500400400133	4" NPT	Ms	flat/thread	1.35	1	
	RS-500400550152	5.1/2" DIN 11	5.1/2" DIN 11	SS	flat	2.95	5
	RS-500400550153			Ms	flat	3.55	6
	RS-500400550154			Al	flat	1.45	6
RS-500400400313	4" NPT	4" BSP	Ms	thread/flat	1.55	1	
	RS-500550200512	5.1/2" DIN 11	2" BSP	SS	flat	2.60	6
	RS-500550200513			Ms	flat	2.90	6
	RS-500550300512	3" BSP	3" BSP	SS	flat	2.55	6
	RS-500550300513			Ms	flat	2.95	6
	RS-500550300514			Al	flat	0.96	6
	RS-500550400512	4" BSP	4" BSP	SS	flat	2.40	6
	RS-500550400513			Ms	flat	2.85	6
	RS-500550400514			Al	flat	0.97	6