


INDUSTRIAL HOSES - steam

Fittings for steam hoses

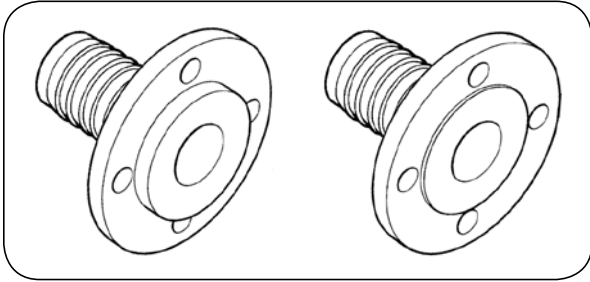

FSS flange fittings

Material: St (galvanized steel),
SS (AISI 316 stainless steel)

Working press.: 18 bar (+210°C) - saturated steam, for other application at ambient temp. up to 160 bar,
From DN65 - 64 bar (contact Technical Department for advice)

Flange fittings designed for rubber steam hoses, with a serrated hose tail, with a lock - to be mounted with safety clamps for steam (EN14423, DIN 2826).

hose I.D.		flange		material	code	
[inch]	[mm]	size	type		swivel flange	fixed flange
1/2"	13	DN15	PN40	St	RS-FSS2-015-013-ST	RS-FSS1-015-013-ST
				SS / St	RS-FSS2-015-013-SST	-
		1/2"	ASA 150	St	RS-FSA2-015-013-ST	RS-FSA1-015-013-ST
			ASA 300	St	RS-FSA4-015-013-ST	RS-FSA3-015-013-ST
3/4"	19	DN20	PN40	St	RS-FSS2-020-019-ST	RS-FSS1-020-019-ST
				SS / St	RS-FSS2-020-019-SST	-
		3/4"	ASA 150	St	RS-FSA2-020-019-ST	RS-FSA1-020-019-ST
			ASA 300	St	RS-FSA4-020-019-ST	RS-FSA3-020-019-ST
1"	25	DN25	PN40	St	RS-FSS2-025-025-ST	RS-FSS1-025-025-ST
				SS / St	RS-FSS2-025-025-SST	-
		1"	ASA 150	St	RS-FSA2-025-025-ST	RS-FSA1-025-025-ST
			ASA 300	St	RS-FSA4-025-025-ST	RS-FSA3-025-025-ST
1.1/4"	32	DN32	PN40	St	RS-FSS2-032-032-ST	RS-FSS1-032-032-ST
				SS / St	RS-FSS2-032-032-SST	-
		1.1/4"	ASA 150	St	RS-FSA2-032-032-ST	RS-FSA1-032-032-ST
			ASA 300	St	RS-FSA4-032-032-ST	RS-FSA3-032-032-ST
1.1/2"	38	DN40	PN40	St	RS-FSS2-040-038-ST	RS-FSS1-040-038-ST
				SS / St	RS-FSS2-040-038-SST	-
		1.1/2"	ASA 150	St	RS-FSA2-040-038-ST	RS-FSA1-040-038-ST
			ASA 300	St	RS-FSA4-040-038-ST	RS-FSA3-040-038-ST
2"	50	DN50	PN16	St	RS-FSS2-050-050-ST	RS-FSS1-050-050-ST
				SS / St	RS-FSS2-050-050-SST	-
			PN40	St	RS-FSS4-050-050-ST	RS-FSS3-050-050-ST
				SS / St	RS-FSS4-050-050-SST	-
		2"	ASA 150	St	RS-FSA2-050-050-ST	RS-FSA1-050-050-ST
			ASA 300	St	RS-FSA4-050-050-ST	RS-FSA3-050-050-ST
2.1/2"	65	DN65	PN16	St	RS-FSS2-065-065-ST	RS-FSS1-065-065-ST
			PN40	St	RS-FSS4-065-065-ST	RS-FSS3-065-065-ST
		2.1/2"	ASA 150	St	RS-FSA2-065-065-ST	RS-FSA1-065-065-ST
			ASA 300	St	RS-FSA4-065-065-ST	RS-FSA3-065-065-ST
3"	75	DN80	PN16	St	RS-FSS2-080-075-ST	RS-FSS1-080-075-ST
			PN40	St	RS-FSS4-080-075-ST	RS-FSS3-080-075-ST
		3"	ASA 150	St	RS-FSA2-080-075-ST	RS-FSA1-080-075-ST
			ASA 300	St	RS-FSA4-080-075-ST	RS-FSA3-080-075-ST
4"	100	DN100	PN16	St	RS-FSS2-100-100-ST	RS-FSS1-100-100-ST
			PN40	St	RS-FSS4-100-100-ST	RS-FSS3-100-100-ST
		4"	ASA 150	St	RS-FSA2-100-100-ST	RS-FSA1-100-100-ST
			ASA 300	St	RS-FSA4-100-100-ST	RS-FSA3-100-100-ST