


INDUSTRIAL FITTINGS - valves

Check valves and filters

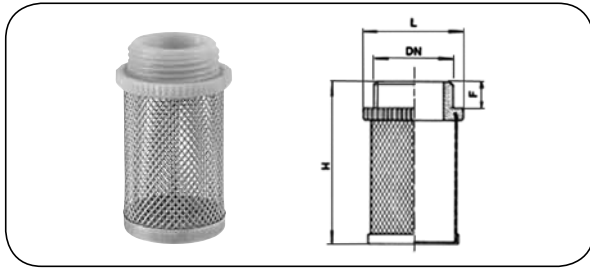


Filter 2310 type

Material: AISI 304 steel
Connection: BSP male thread
Working temp.: From -10°C up to +90°C

A filter used for spring check valves 2280 and 2281 type.

code	thread size [inch]	dimensions [mm]		
		F	H	L
RV-2310-010	3/8	7	51	23
RV-2310-013	1/2	8	50	26
RV-2310-019	3/4	9	57	32
RV-2310-025	1	9	57	41
RV-2310-032	1.1/4	11	68	48
RV-2310-038	1.1/2	11	78	55
RV-2310-050	2	12	95	68
RV-2310-065	2.1/2	13	98	86
RV-2310-075	3	14	113	99
RV-2310-100	4	14	131	122

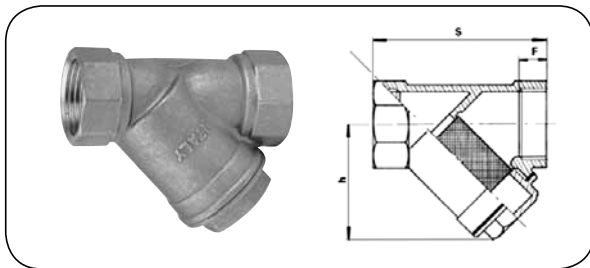

Y-strainer 2500 type

Body material: Brass
Sealing: NBR
Filter refill: AISI 304 steel
Connection: BSP female thread
Working temp.: From -10°C up to +90°C
Working press.: 16 bar

A general purpose Y-strainer used in water supply, sanitary, heating, irrigation and industrial systems. The Y-strainer must be mounted according to the flow direction marked on its body. Working pressure depends on working temperature.

code	thread size [inch]	dimensions [mm]		
		F	h	S
RV-2500-013	1/2	11	38	56
RV-2500-019	3/4	11	50	70
RV-2500-025	1	15	59	88
RV-2500-032	1.1/4	15	68	96
RV-2500-038	1.1/2	16	77	106
RV-2500-050	2	19	93	126
RV-2500-065	2.1/2	21	99	133
RV-2500-075	3	22	132	170
RV-2500-100	4	25	170	219