


INDUSTRIAL FITTINGS - valves

Ball valves

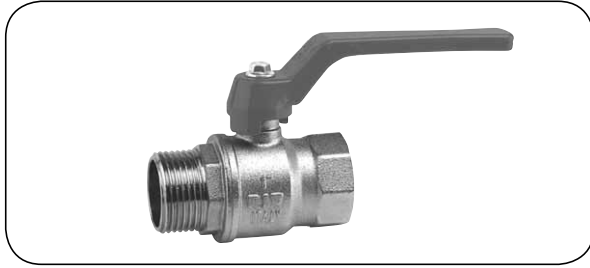

Ball valve 4170/4330 type

Body material: Nickel-plated brass
Ball material: Chrome-plated brass
Handle material: Aluminium
Ball seal: PTFE
Stem seal: NBR
Working temp.: From -20°C up to +110°C

A general purpose ball valve designed for industrial installations. Used for air, gases, water, steam, chemicals, petrochemical products, etc. Working pressure depends on working temperature.

code	flow diameter [mm]	length [mm]	thread size [inch]	working pressure [bar]
4170 type* (2 x BSP female thread)				
RV-4170-006	8	38	1/4	40
RV-4170-010	10	42	3/8	40
RV-4170-013	14.5	48	1/2	40
RV-4170-019	19	57	3/4	32
RV-4170-025	24	69	1	32
RV-4170-032	30.5	79	1.1/4	25
RV-4170-038	37	89	1.1/2	25
RV-4170-050	47	109	2	25
RV-4170-065	60	126	2.1/2	25
RV-4170-075	75	147	3	16
RV-4170-100	94	177	4	16
4330* type (BSP male / female thread)				
RV-4330-006	8	45	1/4	40
RV-4330-010	10	48	3/8	40
RV-4330-013	14.5	55	1/2	40
RV-4330-019	19	65	3/4	32
RV-4330-025	24	77	1	32
RV-4330-032	30.5	87	1.1/4	25
RV-4330-038	37	101	1.1/2	25
RV-4330-050	47	117	2	25
RV-4330-065	60	136	2.1/2	25
RV-4330-075	75	157	3	16
RV-4330-100	94	189	4	16

* available with steel handle - 4171, 4331 type.