

INDUSTRIAL FITTINGS - valves

Ball valves




Ball valve 5310/5311 type

Body material: Nickel-plated brass
Ball material: Chrome-plated brass
Handle material: Aluminjum
Ball seal: PTFE
Stem seal: NBR
Connection: From -10°C up to +110°C
Working temp.: BSP female thread

A general purpose ball valve designed for industrial installations. Used for air, gases, water, steam, chemicals, petrochemical products, etc. Working pressure depends on working temperature.

code	thread size [inch]	flow diameter [mm]	length [mm]	working pressure [bar]
5310 type (T boring)				
RV-5310-006	1/4	10	77	25
RV-5310-010	3/8	12	77	25
RV-5310-013	1/2	14	77	25
RV-5310-019	3/4	18	92	25
RV-5310-025	1	23	104	25
RV-5310-032	1.1/4	29	118	25
RV-5310-038	1.1/2	36	138	25
RV-5310-050	2	45	162	25
5311 type (L boring)				
RV-5311-006	1/4	10	77	25
RV-5311-010	3/8	12	77	25
RV-5311-013	1/2	14	77	25
RV-5311-019	3/4	18	92	25
RV-5311-025	1	23	104	25
RV-5311-032	1.1/4	29	118	25
RV-5311-038	1.1/2	36	138	25
RV-5311-050	2	45	162	25

T boring

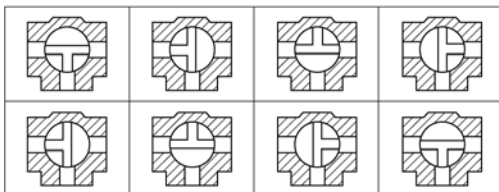

L boring

