


INDUSTRIAL FITTINGS - valves

Ball valves

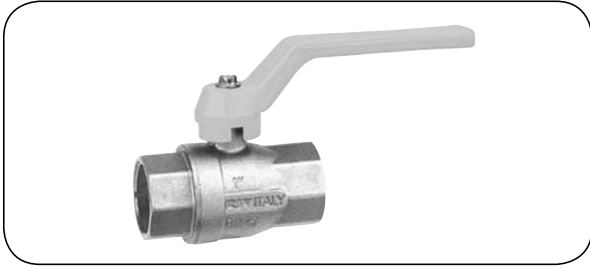

Ball valve 7160 type

Body material: Nickel-plated brass
Ball material: Chrome-plated brass
Handle material: Aluminium
Ball seal: PTFE
Stem seal: FKM + NBR
Connection: BSP female thread
Working temp.: From -20°C up to +60°C

A general purpose ball valve designed for gas installations. Meets the requirements of Directive 97/23/CE (PED), 2009/142/ CE, compliant with EN 331 + A1 standard.

code	flow diameter [mm]	length [mm]	thread size [inch]	working pressure [bar]
RV-7160-006	10	45	1/4	5
RV-7160-010	10	45	3/8	5
RV-7160-013	15	59	1/2	5
RV-7160-019	20	69	3/4	5
RV-7160-025	25	83	1	5
RV-7160-032	32	94	1.1/4	5
RV-7160-038	40	102	1.1/2	5
RV-7160-050	50	124	2	5
RV-7160-065	65	148	2.1/2	5
RV-7160-075	80	171	3	5
RV-7160-100	100	206	4	5



Ball valve 7164 type

Body material: Nickel-plated brass
Ball material: Chrome-plated brass
Handle material: Aluminium
Ball seal: PTFE
Stem seal: FKM + NBR
Connection: BSP female thread
Working temp.: From -20°C up to +60°C

A general purpose ball valve designed for gas installations. Meets the requirements of Directive 97/23/CE (PED), 2009/142/ CE, compliant with EN 331 + A1 standard.

code	flow diameter [mm]	length [mm]	thread size [inch]	working pressure [bar]
RV-7164-06	10	45	1/4	5
RV-7164-10	10	45	3/8	5
RV-7164-13	15	59	1/2	5
RV-7164-19	20	69	3/4	5
RV-7164-25	25	83	1	5