


## INDUSTRIAL PNEUMATICS - hoses

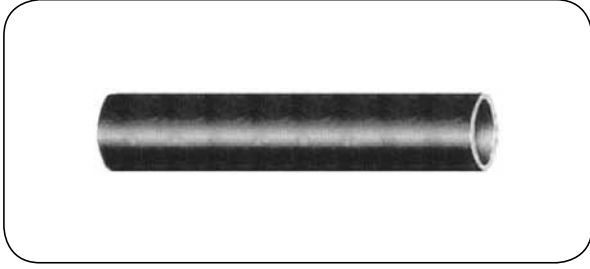

### PA 12 E

**Hose material:** PA 12 polyamide (Nylon)

**Working temp.:** From -10°C up to +80°C

Lightweight, flexible hose with calibrated outside diameter designed for pneumatic, hydraulic, fuel and oil installations, lubrication and chemicals. Available in natural colour.

Standards: DIN 73378.

code	O.D. [mm]	I.D. [mm]	working pressure 20°C [bar]	bending radius [mm]	standard length [m]
SH-PA12-04X02	4	2	40	15	100
SH-PA12-04X03	4	3	18	30	100
SH-PA12-05X03	5	3	30	30	100
SH-PA12-06X04	6	4	25	38	100
SH-PA12-08X05	8	5	26	35	100
SH-PA12-08X06	8	6	18	57	100
SH-PA12-08X5.5	8	5.5	24	48	100
SH-PA12-10X06	10	6	28	35	100
SH-PA12-10X07	10	7	24	45	100
SH-PA12-10X08	10	8	14	76	100
SH-PA12-10X7.5	10	7.5	18	66	100
SH-PA12-12X08	12	8	27	80	100
SH-PA12-12X09	12	9	18	83	100
SH-PA12-12X10	12	10	11	70	100
SH-PA12-14X10	14	10	22	90	100
SH-PA12-14X11	14	11	14	83	100
SH-PA12-15X12	15	12	15	100	100
SH-PA12-16X13	16	13	14	90	100
SH-PA12-18X14	18	14	17	190	100
SH-PA12-20X16	20	16	15	180	100
SH-PA12-22X18	22	18	13	200	100