


## INDUSTRIAL PNEUMATICS - hoses

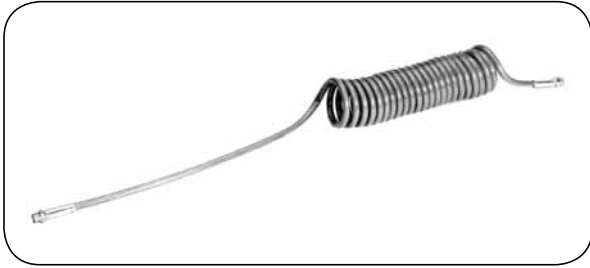

### UBCS

**Hose material:** Blue PUR polyurethane  
**Working temp.:** From -40°C up to +70°C

Highly flexible, spiral, reinforced hose resistant to abrasion, tearing and kinking. Designed for application in car workshops in particular, for pneumatic control systems, hand tools, industrial robots, etc. The hose has straight segments of 100 mm and 500 mm at the ends with BSPT male thread fittings. Shore (A) hardness 98°.

code	O.D. [mm]	I.D. [mm]	working length [m]	outside coil diameter [mm]	coil block length [mm]	working press. 20°C [bar]	fitting male thread [inch]
SH-UBCS-08-020	8	5	2	42	187	15	1/4
SH-UBCS-08-050	8	5	5	42	585	15	1/4
SH-UBCS-08-075	8	5	7.5	42	904	15	1/4
SH-UBCS-08-100	8	5	10	52	952	15	1/4
SH-UBCS-10-020	10	6.5	2	69	137	15	1/4
SH-UBCS-10-050	10	6.5	5	69	429	15	1/4
SH-UBCS-10-075	10	6.5	7.5	69	663	15	1/4
SH-UBCS-10-100	10	6.5	10	69	896	15	1/4
SH-UBCS-12-020	12	8	2	82	140	15	3/8
SH-UBCS-12-050	12	8	5	82	436	15	3/8
SH-UBCS-12-075	12	8	7.5	82	674	15	3/8
SH-UBCS-12-100	12	8	10	97	752	15	3/8
SH-UBCS-15-020	15	10	2	102	140	15	3/8
SH-UBCS-15-050	15	10	5	102	436	15	3/8
SH-UBCS-15-075	15	10	7.5	102	674	15	3/8
SH-UBCS-15-100	15	10	10	102	911	15	3/8
SH-UBCS-16-020	16	11	2	104	147	15	1/2
SH-UBCS-16-050	16	11	5	104	461	15	1/2
SH-UBCS-16-075	16	11	7.5	104	712	15	1/2
SH-UBCS-16-100	16	11	10	104	962	15	1/2