


CLEANING AND WASHING - cleaning of sewage systems

Sewage cleaning hoses

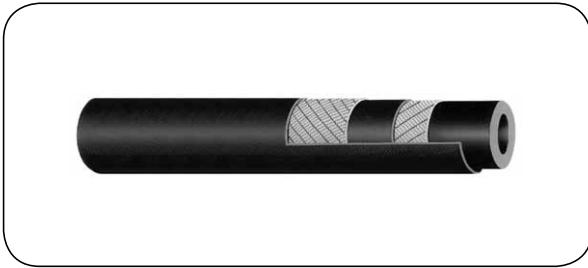

KUKA 250

Internal layer: Black, smooth synthetic rubber

Reinforcement: Two textile braids

External layer: Black, smooth synthetic rubber

Working temp.: From -40°C up to +70°C

Delivery hose designed for high pressure cleaning and flushing of sewage systems. External layer resistant to abrasion, oil mist and weather conditions. Manufactured according to EN ISO 1307 standard. Assembly - use SL-KUKA250-... (IT-58) fittings.

code	I.D. [mm]	O.D. [mm]	bending radius [mm]	working pressure [bar]	bursting pressure [bar]	weight [kg/m]	standard length [m]
SL-KUKA250-13	12.7	25	65	250	625	0.44	120
SL-KUKA250-16	16	28	75	250	625	0.48	120
SL-KUKA250-19	19	31.6	90	250	625	0.60	120
SL-KUKA250-25	25.4	39.3	100	250	625	0.78	120
SL-KUKA250-32	31.8	48	130	250	625	1.06	120
SL-KUKA250-38	38.1	54	150	250	625	1.25	120

KUKA 250 hose fittings

picture	code	thread size [inch]	hose I.D. [mm]	spanner size [mm]
	SL-KUKA250-13-BZ110-08	1/2	13	27
	SL-KUKA250-16-BZ110-10	5/8	16	27
	SL-KUKA250-19-BZ110-12	3/4	19	32
	SL-KUKA250-25-BZ110-16	1	25	41
	SL-KUKA250-32-BZ110-20	1.1/4	32	50
	SL-KUKA250-13-BW110-08	1/2	13	27
	SL-KUKA250-16-BW110-08	1/2	16	27
	SL-KUKA250-16-BW110-10	5/8	16	30
	SL-KUKA250-16-BW110-12	3/4	16	32
	SL-KUKA250-19-BW110-12	3/4	19	32
	SL-KUKA250-25-BW110-16	1	25	41
	SL-KUKA250-32-BW110-20	1.1/4	32	50