


CLEANING AND WASHING - high pressure

Hoses for high pressure cleaning equipment

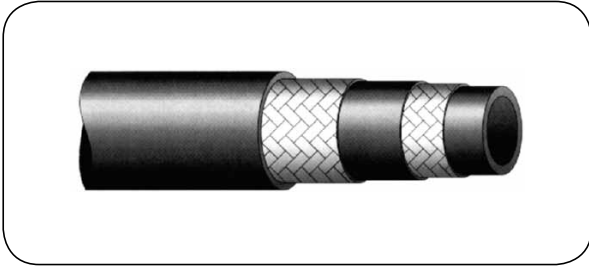

STAR WASH 500

Internal layer: Black, smooth synthetic rubber
Reinforcement: Two steel wire braids
External layer: Black, pinpricked synthetic rubber
Working temp. From -10°C up to +155°C

Hose designed for hot water pressure cleaning equipment. Resistant to detergents, oils, ozone and weather conditions.

code	I.D. [mm]	O.D. [mm]	working pressure [bar]	bursting pressure [bar]	bending radius [mm]	weight [kg/m]
SO-STARWASH500-06	6.6	13.1	500	1600	75	0.28
SO-STARWASH500-08	8.3	14.5	500	1600	60	0.34
SO-STARWASH500-10	9.9	17.1	500	1540	70	0.44
SO-STARWASH500-13	13	20.7	500	1380	90	0.54

The standard complete hose assemblies with fittings and protectors. Other lengths and fittings - contact Technical Department of TUBES INTERNATIONAL®.

code	I.D. [mm]	O.D. [mm]	thread size (inlet)	thread size (outlet)	working pressure [bar]	length [m]
SO-STARWASH500-P1-10-10	9.9	17.1	M22x1.5 female	M22x1.5 female	500	10
SO-STARWASH500-P1-10-15						15
SO-STARWASH500-P1-10-20						20
SO-STARWASH500-P1-10-25						25
SO-STARWASH500-P2-10-10	9.9	17.1	3/8" BSP female	3/8" BSP female	500	10
SO-STARWASH500-P2-10-15						15
SO-STARWASH500-P2-10-20						20
SO-STARWASH500-P2-10-25						25
SO-STARWASH500-P3-10-10	9.9	17.1	M22x1.5 female	3/8" BSP female	500	10
SO-STARWASH500-P3-10-15						15
SO-STARWASH500-P3-10-20						20
SO-STARWASH500-P3-10-25						25

