STORZ symmetrical couplings

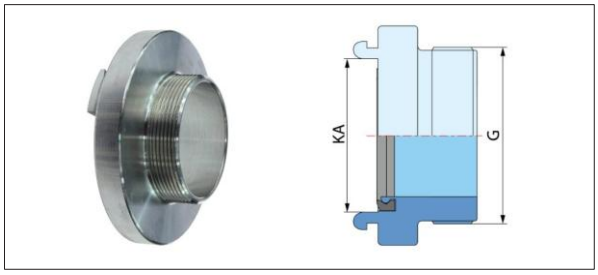

Adaptor with BSP male thread

Material: aluminium (Al), brass (Ms), stainless steel (SS)
Work. pressure: 16 bar
Seal: white NBR rubber for aluminium, black NBR rubber for brass, viton for stainless steel

index (aluminium)	index (brass)	index (steel steel)	size	spacing of lugs KA [mm]	size thread G [inch]
-	ST-22-031050-30*	ST-22-031050-43	25-D	31	1/2
ST-22-031075-11	ST-22-031075-30	ST-22-031075-43			3/4
ST-22-031100-11	ST-22-031100-30	ST-22-031100-43			1
ST-22-031125-11	-	-			1.1/4
ST-22-031150-11	-	-			1.1/2
ST-22-044100-11	ST-22-044100-30	-	32	44	1
ST-22-044125-11	ST-22-044125-30	-			1.1/4
ST-22-051125-11	ST-22-051125-30	ST-22-051125-43*	38	51	1.1/4
ST-22-051150-11	ST-22-051150-30	ST-22-051150-43			1.1/2
ST-22-051200-11	ST-22-051200-30	-			2
ST-22-059200-11	-	-	45	59	2
ST-22-066075-16*	-	-	52-C	66	3/4
ST-22-066100-16	ST-22-066100-30	ST-22-066100-43			1
ST-22-066125-16	ST-22-066125-30	ST-22-066125-43			1.1/4
ST-22-066150-16	ST-22-066150-30	ST-22-066150-43			1.1/2
ST-22-066200-16	ST-22-066200-30	ST-22-066200-43			2
ST-22-066250-16	ST-22-066250-30	-			2.1/2
ST-22-081125-11	-	-	65	81	1.1/4
ST-22-081150-11	-	-			1.1/2
ST-22-081200-11	ST-22-081200-30	ST-22-081200-43			2
ST-22-081250-11	ST-22-081250-30	ST-22-081250-43			2.1/2
ST-22-081300-11	ST-22-081300-30	-			3
ST-22-089200-16	ST-22-089200-30	ST-22-089200-43	75-B	89	2
ST-22-089250-16	ST-22-089250-30	ST-22-089250-43			2.1/2
ST-22-089300-16	ST-22-089300-30	ST-22-089300-43			3
ST-22-105300-11*	-	-	90	105	3
ST-22-115400-11	ST-22-115400-30	ST-22-115400-43*	100	115	4
ST-22-133400-11	ST-22-133400-30	ST-22-133400-43	110-A	133	4
ST-22-133500-11	-	-			5
ST-22-148500-11*	-	-	125	148	5
ST-22-160600-11	-	-	150	160	6
ST-22-188600-11**	-	-	165	188	6
ST-22-220800-11**	-	-	205	220	8

* - with nipple
** - with nipple, PN 10 bar