


HIGH PRESSURE - rotary unions



TEMA SWIVEL

Body: Brass
Female pin: Hardened steel
 (for version RF - stainless steel)
Nut: Galvanized steel
Seal: NBR
Working temp.: From -40°C up to +90°C

Union used in systems that require rotary connection or to eliminate stress of hose assemblies. Characterized by small sizes and low torque. The maximum rotational speed is (60 r.p.m.). Suitable for hydraulic oil or water (RF version).

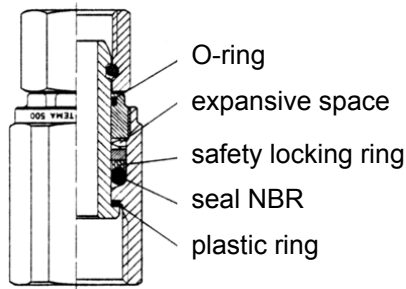

code	size [inch]	I.D. [mm]	thread (1)		thread (2)		working pressure [bar]
			female	male	female	male	
TA-R-250	1/4	6	1/4	-	3/8	-	250
TA-R-250RF	1/4	6	1/4	-	3/8	-	250
TA-R-500	1/2	11	1/2	-	3/4	-	250
TA-R-500RF	1/2	11	1/2	-	3/4	-	250
TA-R-500B	1/2	11	1/2	-	-	1/2	250
TA-R-500W	1/2	11	-	M18x1.5	-	1/2	250
TA-R-500W5	1/2	11	-	M22x1.5	-	1/2	250
TA-R-500W6	1/2	11	-	M24x1.5	-	1/2	250
TA-R-500-30	1/2	11	-	7/8-14UNF	-	3/4	250
TA-R-500-31	1/2	11	-	7/8-14UNF	-	7/8-14UNF	250
TA-R-500-32	1/2	11	-	7/8-14UNF	-	1/2	250
TA-R-750	3/4	17	3/4	-	1	-	250
TA-R-750RF	3/4	17	3/4	-	1	-	250
TA-R-1000	1	22	1	-	1.1/4	-	200
TA-R-1000RF	1	22	1	-	1.1/4	-	200