


INDUSTRIAL FITTINGS - valves

Butterfly valves

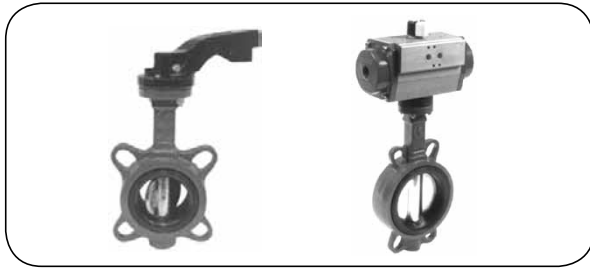

Butterfly valve 1125 type

Body material: Grey cast iron EN-GJL-250
Disc material: Nickel-plated ductile iron EN-GJS-400-15
Sealing: EPDM
Connection: PN10/PN16 flange
Working temp.: From -10°C up to +110°C

A general purpose butterfly valve designed for industrial installations. Opened and closed manually or with a pneumatic actuator. Equipped with 10-position locking handle - open, closed and intermediate positions.

code (manual operation)	code (pneumatic operation)	DN	actuator ISO 5211 type	build-in length [mm]	working pressure [bar]	weight [kg]
TD-1125-040H	TD-1125-040P	40	F05	33	16	2.00
TD-1125-050H	TD-1125-050P	50	F05	43	16	2.50
TD-1125-065H	TD-1125-065P	65	F05	46	16	3.10
TD-1125-080H	TD-1125-080P	80	F05	46	16	3.85
TD-1125-100H	TD-1125-100P	100	F05	52	16	4.75
TD-1125-125H	TD-1125-125P	125	F07	56	16	6.35
TD-1125-150H	TD-1125-150P	150	F07	56	16	8.50
TD-1125-200H	TD-1125-200P	200	F10	60	16	13.00
TD-1125-250H	TD-1125-250P	250	F12	68	16	29.75
TD-1125-300H	TD-1125-300P	300	F12	78	16	37.65



Butterfly valve 1123 type

Body material: Grey cast iron EN-GJL-250
Disc material: AISI 316 steel
Sealing: EPDM
Connection: PN10/PN16 flange
Working temp.: From -10°C up to +90°C

A general purpose butterfly valve designed for industrial installations. Opened and closed manually or with a pneumatic actuator. Equipped with 10-position locking handle - open, closed and intermediate positions.

code (manual operation)	code (pneumatic operation)	DN	actuator ISO 5211 type	build-in length [mm]	working pressure [bar]	weight [kg]
TD-1123-040H	TD-1123-040P	40	F05	33	16	2.00
TD-1123-050H	TD-1123-050P	50	F05	43	16	2.50
TD-1123-065H	TD-1123-065P	65	F05	46	16	3.10
TD-1123-080H	TD-1123-080P	80	F05	46	16	3.85
TD-1123-100H	TD-1123-100P	100	F05	52	16	4.75
TD-1123-125H	TD-1123-125P	125	F07	56	16	6.35
TD-1123-150H	TD-1123-150P	150	F07	56	16	8.50
TD-1123-200H	TD-1123-200P	200	F10	60	16	13.00
TD-1123-250H	TD-1123-250P	250	F12	68	16	29.75
TD-1123-300H	TD-1123-300P	300	F12	78	16	37.65