
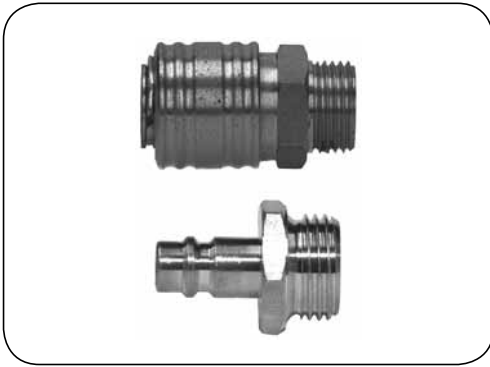


INDUSTRIAL FITTINGS - quick release couplings


EWO couplings




EUROSTANDARD DN 7.2

- Standard:** Eurostandard DN 7.2 ÷ 7.8
Application: Pneumatics
 (air, nitrogen, other nonflammable gases)
Working press.: 16 bar (safety factor 1.5)
Flow rate: 1500 l/min, Pe = 6 bar, Δp = 1bar (single shut-off)
 675 l/min, Pe = 6 bar, Δp = 1bar (double shut-off)
Working temp.: From -10°C up to +90°C
Material: Brass, pins and spring of stainless steel
Seal: NBR
Advantages: Inexpensive, popular

Quick release coupling with a popular plug design. Intended for one hand operation. A locking pin system enables fast and easy connection of a plug to a socket. Available as single shut-off or double shut-off couplings. The single shut-off version must not be connected to the double shut-off (the valve will not open). Optionally, the single shut-off plugs made of carbon steel can be also supplied. The quick release couplings are interchangeable with all couplings according to Eurostandard DN 7.2 ÷ 7.8 of other producers.

	code	hose I.D. [mm]	length [mm]	spanner size [mm]	description
	TP-ES72-GK-06X	6	57	21	Single shut-off socket with hose tail.
	TP-ES72-GK-08X	8	57	21	
	TP-ES72-GK-09X	9	57	21	
	TP-ES72-GK-10X	10	57	21	
	TP-ES72-GK-13X	13	57	21	

	code	thread size	length [mm]	spanner size [mm]	description
	TP-ES72-GW-02X	1/8" BSP	41	21	Single shut-off socket with female thread
	TP-ES72-GW-04X	1/4" BSP	41	21	
	TP-ES72-GW-06X	3/8" BSP	41	21	
	TP-ES72-GW-08X	1/2" BSP	43	24	
	TP-ES72-GW-M14X	M14x1.5	43	21	
	TP-ES72-GW-M16X	M16x1.5	43	21	
TP-ES72-GW-M18X	M18x1.5	43	21		

	code	thread size	length [mm]	spanner size [mm]	description
	TP-ES72-GZ-02X	1/8" BSP	41	21	Single shut-off socket with male thread.
	TP-ES72-GZ-04X	1/4" BSP	41	21	
	TP-ES72-GZ-06X	3/8" BSP	42.5	21	
	TP-ES72-GZ-08X	1/2" BSP	45	24	
	TP-ES72-GZ-M14X	M14x1.5	41	21	
	TP-ES72-GZ-M16X	M16x1.5	41	21	
TP-ES72-GZ-M18X	M18x1.5	41	21		