


# INDUSTRIAL HOSES - silicone

## General purpose hoses

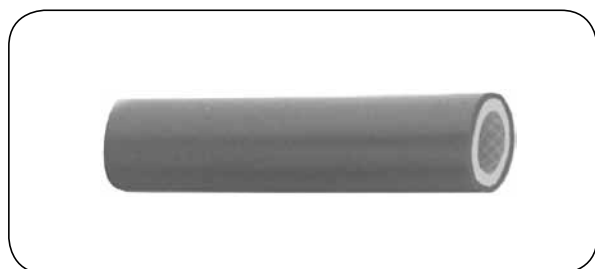

### REDSIL

**Internal layer:** Transparent silicone  
**Reinforcement:** PET braid  
**External layer:** Red silicone  
**Hardness:** 70° ± 5° Shore (A)  
**Working temp.:** From -60°C up to +180°C

Delivery hose widely used in industry (e.g. in cooling systems and hot air transfer). Meets the requirements of FDA 21 CFR 177.2600 and BfR XV.

code	I.D. [mm]	wall thickness [mm]	bursting press. 20°C [bar]	bursting press. 95°C [bar]	bursting press. 130°C [bar]	standard length [m]
TS-REDSIL-03X2,5	3	2.5	82	76	40	25
TS-REDSIL-04X2,5	4	2.5	69	59	35	25
TS-REDSIL-05X3,0	5	3	57	41	30	25
TS-REDSIL-06X3,0	6	3	56	39	28	25
TS-REDSIL-07X3,2	7	3.2	55	37	27	25
TS-REDSIL-07X3,5	7	3.5	55	37	27	25
TS-REDSIL-08X3,2	8	3.2	49	34	26	25
TS-REDSIL-08X3,5	8	3.5	49	34	26	25
TS-REDSIL-09X3,5	9	3.5	47	33	25	25
TS-REDSIL-09X3,8	9	3.8	47	33	25	25
TS-REDSIL-10X3,5	10	3.5	44	32	24	25
TS-REDSIL-10X4,0	10	4	44	32	24	25
TS-REDSIL-11X3,5	11	3.5	42	31	23	25
TS-REDSIL-11X4,0	11	4	42	31	23	25
TS-REDSIL-12X3,5	12	3.5	39	29	22	25
TS-REDSIL-12X4,0	12	4	39	29	22	25
TS-REDSIL-13X3,5	13	3.5	38	28	22	25
TS-REDSIL-13X4,0	13	4	38	28	22	25
TS-REDSIL-14X4,0	14	4	37	28	21	25
TS-REDSIL-14X4,5	14	4.5	37	28	21	25
TS-REDSIL-15X4,0	15	4	36	27	21	25
TS-REDSIL-15X4,5	15	4.5	36	27	21	25
TS-REDSIL-16X4,0	16	4	35	26	21	25
TS-REDSIL-16X4,5	16	4.5	35	26	21	25
TS-REDSIL-17X4,0	17	4	34	25	20	25
TS-REDSIL-17X4,5	17	4.5	34	25	20	25
TS-REDSIL-18X4,0	18	4	33	24	20	25
TS-REDSIL-18X4,5	18	4.5	33	24	20	25
TS-REDSIL-19X4,5	19	4.5	32	24	20	25
TS-REDSIL-19X5,0	19	5	32	24	20	25
TS-REDSIL-20X5,0	20	5	31	23	19	25
TS-REDSIL-20X5,5	20	5.5	31	23	19	25