


TYGON® and VERSILON™ universal hoses

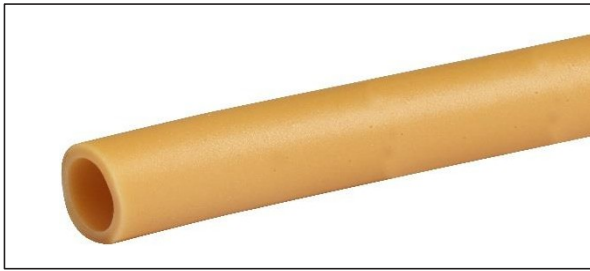

VERSILON™ GA

Multi-purpose, soft, flexible and stretchy hose made of light brown natural rubber

Material:	natural rubber (NR)
Operating temp:	-35°C to +70°C (120°C for moist heat)
Brittleness temperature:	- 40°C
Hardness:	40° Shore (A)
Density:	0.98 g/cm ³

Well-known and proven over the years, light and soft natural rubber hose with a light brown colour. Easy to install thanks to its softness (hardness 40°Shore - A), flexibility and elasticity (maximum stretch of 500%). It has similar properties to latex. Resistant to abrasion, with good resistance to acids and alkalis. Used for liquids and gases for many industrial applications, e.g. bottling and dispensing of soaps and detergents, alcoholic and dairy products, laboratories. Meets FDA requirements for food contact. Sterilised by 30 min steam (1 bar, 141°C) or ethylene oxide. Full hose reel length 50 m and 25 m (as per table).

index	internal diameter [mm]	external diameter [mm]	wall thickness [mm]	Working pressure * [bar]	bend radius [mm]	Full roll length [m]
VE-702030	2	4	1	0,5	7	50
VE-702075	3	5	1	0,46	11	50
VE-702195	4	6	1	0,36	12	50
VE-702210	4	7	1,5	0,54	12	50
VE-702225	4	8	2	0,61	7	50
VE-702315	5	8	1,5	0,46	18	50
VE-702330	5	9	2	0,54	14	50
VE-702345	5	10	2,5	0,61	13	50
VE-702405	6	9	1,5	0,37	29	50
VE-702420	6	10	2	0,45	19	50
VE-702465	7	10	1,5	0,31	37	25
VE-702480	7	11	2	0,41	26	25
VE-702495	7	13	3	0,64	20	25
VE-702525	8	12	2	0,37	28	25
VE-702555	8	16	4	0,61	17	25
VE-702585	10	14	2	0,37	50	25
VE-702600	10	15	2,5	0,41	40	25
VE-702615	12	17	2,5	0,28	52	25
VE-702630	15	21	3	0,3	70	25
VE-702645	18	24	3	0,28	99	25
VE-702660	20	27	3,5	0,24	99	25

* - working pressure determined in relation to burst pressure with a safety factor of 1:5