


Silicone hoses for general applications

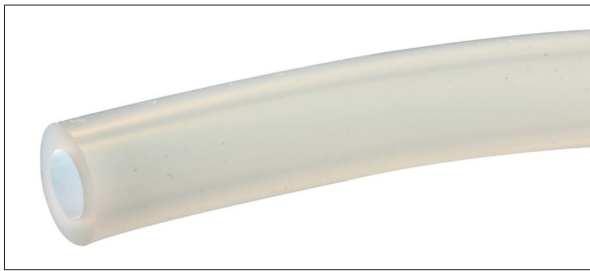

VERSITEC™

Universal non-reinforced silicone hose

Material:	translucent silicone
Hardness:	60 Shore (A)
Density:	1.15 g/cm ³
Operating temperature:	-50°C to +200°C (temporarily + 230°C)

Versatile, soft and flexible industrial quality *peroxide cured* silicone hose. Suitable for low-pressure fluids and other industrial applications using the general properties of silicone (chemical and temperature resistance, electro-insulating properties). Translucent, hydrophobic and with anti-adhesion properties. Extremely resistant to UV radiation, oxygen and ozone. Steam (30 min, 1 bar, +141°C), ethylene oxide or radiation sterilisation (up to 2.5 Mrad) possible. Compliant with the RoHS material directive 2011/65/EU and REACH regulation 1907/2006/EU - contains no hazardous or prohibited substances. Pressure safety factor of 5:1. Mounting on spigots and terminals without sharp notches by means of bands and clamps.

index	internal diameter [mm]	external diameter [mm]	wall thickness [mm]	working pressure 20°C [bar]	bend radius [mm]	mass [kg/m]	standard length [m]
VE-761804	1,5	3	0,75	0,72	4	0,006	50
VE-761806	2	4	1	0,6	7	0,011	50
VE-761807*	2	5,5	1,75	0,81	3	0,024	50
VE-761809	2	6	2	0,9	3	0,029	50
VE-761812	3	5	1	0,55	8	0,014	50
VE-761814	3	6	1,5	0,64	7	0,024	50
VE-761816	3	7	2	0,75	5	0,036	50
VE-761819	4	6	1	0,4	15	0,018	50
VE-761821	4	7	1,5	0,54	10	0,030	25
VE-761823	4	8	2	0,5	8	0,043	25
VE-761825	4	10	3	0,75	6	0,075	25
VE-761828*	5	7	1	0,4	25	0,022	25
VE-761830	5	8	1,5	0,45	16	0,035	25
VE-761832	5	9	2	0,6	14	0,050	25
VE-761834	5	10	2,5	0,64	11	0,067	25
VE-761837*	6	8	1	0,3	36	0,025	25
VE-761839	6	9	1,5	0,37	26	0,040	25
VE-761841	6	10	2	0,47	19	0,058	25
VE-761843	6	12	3	0,64	12	0,098	25
VE-761846	7	10	1,5	0,31	32	0,046	25
VE-761848*	7	11	2	0,39	23	0,065	25
VE-761850*	7	12	2,5	0,51	18	0,085	25
VE-761852	7	13	3	0,55	15	0,108	25
VE-761855*	8	11	1,5	0,31	35	0,051	25
VE-761857	8	12	2	0,35	28	0,072	25
VE-761859	8	14	3	0,5	18	0,118	25
VE-761860	8	16	4	0,61	14	0,172	25
VE-761862*	9	13	2	0,37	39	0,079	25
VE-761864	10	14	2	0,36	46	0,087	25
VE-761866	10	16	3	0,45	30	0,140	25
VE-761868	10	18	4	0,5	26	0,201	25
VE-761871	12	17	2,5	0,28	47	0,130	25
VE-761874	15	21	3	0,31	70	0,193	25
VE-761877	18	24	3	0,26	87	0,226	10
VE-761880	20	27	3,5	0,29	102	0,295	10
VE-761883	25	35	5	0,28	111	0,537	10
VE-761886*	30	40	5	0,26	204	0,627	10
VE-761888*	40	50	5	0,25	270	0,806	10

* - minimum order quantities apply for these sizes