


# INDUSTRIAL HOSES - metal

## Stripwound hoses

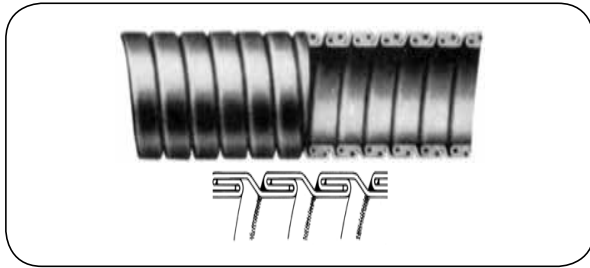

### GRIPLOCK 304 (316)

**Material:** AISI 304 steel (AISI 316 steel - the same parameters, code WH-GRI-PLOCK-316...)

**Working temp.:** Up to +650°C

Flexible steel hose designed to transfer gas with fluid particles, smoke, fumes, dry loose materials (ash, dust, grain, granulated products). Widely used also as a protection hose. Assembled on exhaust outlets of engines to absorb vibration, noise and to limit thermal expansion. Standard version maintains shape. FLOPPY version that does not maintain shape is available up to 76 mm diameter (code example: WH-GRI-PLOCK-304-006-F).

code	I.D. [mm]	O.D. [mm]	bending radius [mm]	weight [kg/m]
WH-GRI-PLOCK-304-006	6	8	33	0.10
WH-GRI-PLOCK-304-008	8	10	40	0.15
WH-GRI-PLOCK-304-010	10	12	49	0.18
WH-GRI-PLOCK-304-012	12	15	68	0.23
WH-GRI-PLOCK-304-016	16	19	73	0.31
WH-GRI-PLOCK-304-020	20	23	79	0.34
WH-GRI-PLOCK-304-022	22	25	85	0.38
WH-GRI-PLOCK-304-025	25	28	90	0.40
WH-GRI-PLOCK-304-028	28	32	115	0.48
WH-GRI-PLOCK-304-032	32	36	120	0.55
WH-GRI-PLOCK-304-035	35	39	125	0.60
WH-GRI-PLOCK-304-038	38	42	130	0.65
WH-GRI-PLOCK-304-041	41	45	142	0.70
WH-GRI-PLOCK-304-045	45	49	153	0.77
WH-GRI-PLOCK-304-048	48	52	164	0.82
WH-GRI-PLOCK-304-051	51	55	175	0.87
WH-GRI-PLOCK-304-054	54	59	189	0.97
WH-GRI-PLOCK-304-057	57	62	204	1.03
WH-GRI-PLOCK-304-060	60	65	218	1.08
WH-GRI-PLOCK-304-063	63	68	232	1.14
WH-GRI-PLOCK-304-070	70	75	260	1.26
WH-GRI-PLOCK-304-076	76	81	264	1.71
WH-GRI-PLOCK-304-079	79	85	273	1.77
WH-GRI-PLOCK-304-083	83	89	283	1.86
WH-GRI-PLOCK-304-086	86	92	295	1.93
WH-GRI-PLOCK-304-089	89	95	305	2.00
WH-GRI-PLOCK-304-092	92	98	318	2.06
WH-GRI-PLOCK-304-095	95	101	328	2.13
WH-GRI-PLOCK-304-098	98	104	339	2.20
WH-GRI-PLOCK-304-102	102	108	345	2.29
WH-GRI-PLOCK-304-108	108	114	368	2.42
WH-GRI-PLOCK-304-114	114	120	388	2.56
WH-GRI-PLOCK-304-127	127	133	424	2.85
WH-GRI-PLOCK-304-140	140	146	469	3.14
WH-GRI-PLOCK-304-152	152	158	510	3.41
WH-GRI-PLOCK-304-178	178	184	590	3.99
WH-GRI-PLOCK-304-203	203	209	673	4.55
WH-GRI-PLOCK-304-229	229	235	755	5.14
WH-GRI-PLOCK-304-254	254	260	838	7.93
WH-GRI-PLOCK-304-279	279	285	919	8.71
WH-GRI-PLOCK-304-305	305	311	1000	9.52
WH-GRI-PLOCK-304-330	330	336	1085	10.30
WH-GRI-PLOCK-304-356	356	362	1169	11.11
WH-GRI-PLOCK-304-381	381	387	1250	11.89
WH-GRI-PLOCK-304-406	406	412	1334	12.67
WH-GRI-PLOCK-304-432	432	438	1418	13.48
WH-GRI-PLOCK-304-457	457	463	1500	14.26