Coiled steel hoses

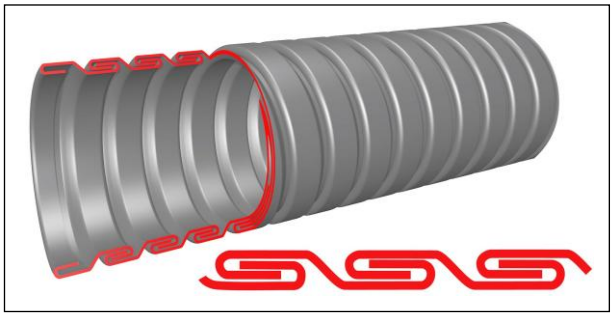

GRIPLOCK G

Coiled steel hose - extraction, bulk material and protective

Material: Galvanised carbon steel
Temp. working: Dto +500°C

Flexible coiled steel hose used to discharge gases with liquid particles, fumes, vapours, to convey dry bulk materials (ash, dust, grain, granulates), and as a protective hose. Fitted in exhaust systems of combustion engines as a component absorbing vibration and noise and reducing the effects of thermal expansion. Available in a standard version that holds its shape, and up to diameter 76 in a FLOPPY version that does not hold its shape (example index: WH-GRIPLOCK-G-010F).

index	inner. inner. [mm]	inner. outer [mm]	bending bend [mm]	weight [kg/m]	index	inner. inner. [mm]	inner. outer [mm]	bending bend [mm]	weight [kg/m]
WH-GRIPLOCK-G-006	6	9	25	0,16	WH-GRIPLOCK-G-089	89	94	290	2,61
WH-GRIPLOCK-G-008	8	11	30	0,18	WH-GRIPLOCK-G-092	92	97	302	2,70
WH-GRIPLOCK-G-010	10	13	33	0,23	WH-GRIPLOCK-G-095	95	100	312	2,85
WH-GRIPLOCK-G-012	12	16	45	0,30	WH-GRIPLOCK-G-098	98	103	322	2,92
WH-GRIPLOCK-G-016	16	20	55	0,33	WH-GRIPLOCK-G-102	102	107	328	3,10
WH-GRIPLOCK-G-020	20	24	59	0,34	WH-GRIPLOCK-G-108	108	115	350	3,15
WH-GRIPLOCK-G-022	22	26	63	0,40	WH-GRIPLOCK-G-114	114	121	369	3,25
WH-GRIPLOCK-G-025	25	29	78	0,49	WH-GRIPLOCK-G-121	121	128	369	3,33
WH-GRIPLOCK-G-028	28	33	90	0,62	WH-GRIPLOCK-G-127	127	134	403	3,40
WH-GRIPLOCK-G-032	32	37	96	0,75	WH-GRIPLOCK-G-140	140	147	446	3,80
WH-GRIPLOCK-G-035	35	40	103	0,88	WH-GRIPLOCK-G-152	152	159	485	4,19
WH-GRIPLOCK-G-038	38	45	110	1,01	WH-GRIPLOCK-G-178	178	185	560	4,85
WH-GRIPLOCK-G-041	41	48	115	1,08	WH-GRIPLOCK-G-203	203	210	640	5,50
WH-GRIPLOCK-G-045	45	52	123	1,18	WH-GRIPLOCK-G-229	229	236	718	6,15
WH-GRIPLOCK-G-048	48	55	129	1,26	WH-GRIPLOCK-G-254	254	261	797	6,80
WH-GRIPLOCK-G-051	51	58	135	1,35	WH-GRIPLOCK-G-279	279	286	873	7,60
WH-GRIPLOCK-G-054	54	61	143	1,37	WH-GRIPLOCK-G-305	305	312	950	8,40
WH-GRIPLOCK-G-057	57	64	150	1,39	WH-GRIPLOCK-G-330	330	337	1030	8,98
WH-GRIPLOCK-G-060	60	67	158	1,41	WH-GRIPLOCK-G-356	356	363	1112	9,55
WH-GRIPLOCK-G-063	63	70	165	1,42	WH-GRIPLOCK-G-381	381	388	1188	10,25
WH-GRIPLOCK-G-070	70	77	180	1,68	WH-GRIPLOCK-G-406	406	413	1268	10,90
WH-GRIPLOCK-G-076	76	83	195	2,25	WH-GRIPLOCK-G-432	432	439	1348	11,60
WH-GRIPLOCK-G-079	79	84	260	2,30	WH-GRIPLOCK-G-457	457	464	1425	12,25
WH-GRIPLOCK-G-083	83	88	269	2,45	WH-GRIPLOCK-G-483	483	490	1504	12,90
WH-GRIPLOCK-G-086	86	91	280	2,52	WH-GRIPLOCK-G-508	508	515	1582	13,60