


HYDRAFIX FR 201

Inner layer: Black PVC
Reinforcement: Steel supporting coil (additional nickel-plated steel helix protection up to DN 10)
Working press.: 4 bar

Hose designed for low pressure transfer of air, water, oils and other coolants used during metalworking processes. Due to the special construction, the hose has so-called shape memory, so once bent, it remains in that position. Therefore, it is easy to direct the jet of coolant precisely in the desired direction. Supplied as complete hose assemblies with BSP male thread connection and an outlet nozzle. Code example of DN 6 hose assembly, 500 mm long: WR-FR201-06-500.

code	DN [mm]	thread [inch]	spanner size [mm]	bending radius [mm]	length [mm]						
WM-FR201-04-...	4	1/8	15	64	200	250	320	400	-	-	-
WM-FR201-06-...	6	1/4	19	72	200	250	320	400	500	630	-
WM-FR201-08-...	8	3/8	24	88	-	250	320	400	500	630	-
WM-FR201-10-...	10	1/2	27	110	-	-	320	400	500	630	800
WM-FR201-16-...	16	3/4	36	110	-	-	-	-	500	630	-

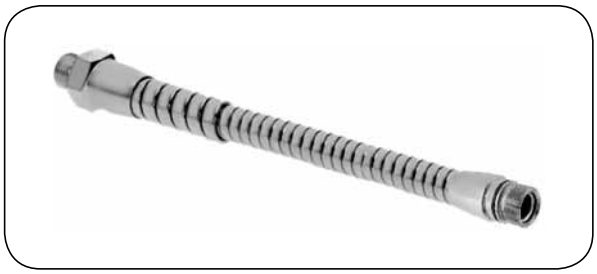

HYDRAFIX FR 211

Inner layer: Black PVC
Reinforcement: Steel supporting coil (additional nickel-plated steel helix protection up to DN 10)
Working press.: 4 bar

Hose designed for low pressure transfer of air, water, oils and other coolants used during metalworking processes. Due to the special construction, the hose has so-called shape memory, so once bent, it remains in that position. Therefore, it is easy to direct the jet of coolant precisely in the desired direction. Supplied as complete hose assemblies with BSP male thread with metric male thread. Code example of DN 6 hose assembly, 500 mm long: WM-FR211-06-500.

code	DN [mm]	thread [inch]	thread outlet [mm]	spanner size [mm]	bending radius [mm]	length [mm]						
WM-FR211-04-...	4	1/8	M10x1	15	64	220	250	320	400	-	-	-
WM-FR211-06-...	6	1/4	M12x1	19	72	200	250	320	400	500	630	-
WM-FR211-08-...	8	3/8	M16x1	24	88	-	250	320	400	500	630	-
WM-FR211-10-...	10	1/2	M18x1	27	110	-	-	320	400	500	630	800
WM-FR211-16-...	16	3/4	M26x1.5	36	110	-	-	-	-	500	630	-