


CLEANING AND WASHING - cleaning of sewage systems

Sewage cleaning hoses

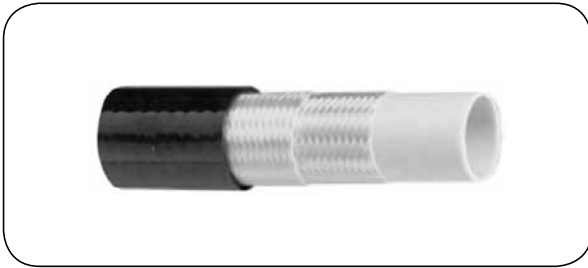


JC 8

Internal layer: Thermoplastic polyester
Reinforcement: Two polyester braids
External layer: Red polyurethane, abrasion resistant
Working temp.: From -40°C up to +55°C

Hose designed for high pressure cleaning of sewage systems. Standard length: 80, 100, 120, 150, 180, 200, 250 m. Assembly - use ZC-BPJC type fittings (IT-49).

code	I.D. [mm]	O.D. [mm]	working pressure [bar]	bursting pressure [bar]	bending radius [mm]	weight [kg/100 m]
ZC-JC8-03	3.5	8.5	345	862	25	5.70
ZC-JC8-05	4.8	10.5	345	862	30	8.20
ZC-JC8-06	6.4	12.7	345	862	50	10.80
ZC-JC8-10	9.7	16.5	345	862	75	15.70
ZC-JC8-13	13.0	22.4	345	862	100	29.20
ZC-JC8-19	19.2	29.8	250	625	120	46.00
ZC-JC8-25	25.6	37.3	250	625	150	64.30
ZC-JC8-32	32.0	46.0	250	625	235	98.50

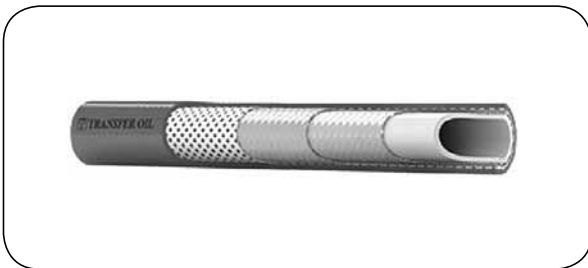

ECOLOGY 210HD / 250HD

Internal layer: Polyethylene
Reinforcement: One or two synthetic fibre braids + one braid for cover integration
External layer: Polyurethane
 - E210HD - blue
 - E250HD - red
Working temp.: From -40°C up to +60°C

Hose designed for high pressure cleaning of sewage system. Suitable for water-based fluids used for cleaning, scrubbing, etc. Resistant to abrasion and microorganisms, flexible in a full range of working temperatures. Suitable for high humidity working conditions. The external layer is resistant to acids, bases, oil and grease. Not designed to transfer hydraulic fluids and solvents.

Supplied as a complete hose assembly with specified length "L" with male or female BSP 60° thread fittings (e.g. code no. of the assembly hose E250HN Ø1/2", 40 meter long - TO-E250HD-12-040). Standard length: 40, 60, 80, 100, 120, 150, 180, 200, 240, 300 m.

Other fittings are available - contact TUBES INTERNATIONAL® Technical Department.

code	I.D. [inch]	O.D. [mm]	thread size [inch]	working pressure [bar]	bursting pressure [bar]	bending radius [mm]	weight [kg/m]
TO-E210HD-20-L	3/4	30.0	3/4	210	525	120	0.42
TO-E210HD-25-L	1	38.3	1	210	525	155	0.74
TO-E210HD-32-L	1.1/4	47.4	1.1/4	210	525	240	1.04
TO-E250HD-12-L	1/2	22.3	1/2	250	625	75	0.28
TO-E250HD-20-L	3/4	30.1	3/4	250	625	120	0.47
TO-E250HD-25-L	1	39.6	1	250	625	155	0.80
TO-E250HD-32-L	1.1/4	49.6	1.1/4	250	625	240	1.23