


INDUSTRIAL PNEUMATICS - hoses

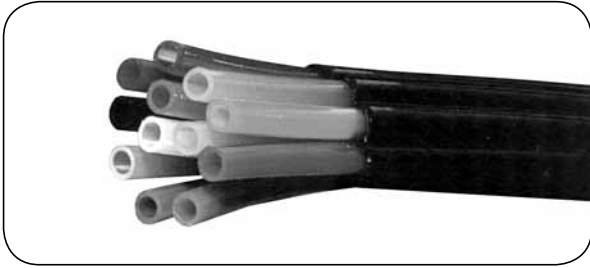

PA 12 MULTI

Hose material: PA 12 polyamide (Nylon)
Working temp.: From -20°C up to +80°C
 (for fluids containing water to +65°C)

Multihose with a black polyurethane outside cover widely used in pneumatic, hydraulic, fuel and oil installations, lubrication and chemicals. Different colours of hoses in the bundle enable easy recognition of each circuit or medium being transferred.

code	number of hoses	O.D. [mm]	I.D. [mm]	wall thickness [mm]	working pressure [bar]	bursting pressure [bar]	weight [g/m]
ZC-M422A	2	4	2	1	33	132	40
ZC-M4252A		4	2.5	0.75	22	88	36
ZC-M4272A		4	2.7	0.65	17	68	35
ZC-M642A		6	4	1	20	80	60
ZC-M862A		8	6	1	14	56	78
ZC-M1082A		10	8	1	11	44	128
ZC-M12102A		12	10	1	9	36	187
ZC-M14122A		14	12	1	7.5	30	211
ZC-M15122A		15	12	1.5	11	44	267
ZC-M151252A		15	12.5	1.25	9	36	247
ZC-M423A	3	4	2	1	33	132	57
ZC-M4253A		4	2.5	0.75	22	88	51
ZC-M4273A		4	2.7	0.65	17	68	48
ZC-M643A		6	4	1	20	80	76
ZC-M863A		8	6	1	14	56	118
ZC-M1083A		10	8	1	11	44	148
ZC-M12103A		12	10	1	9	36	215
ZC-M14123A		14	12	1	7.5	30	243
ZC-M15123A		15	12	1.5	11	44	303
ZC-M151253A		15	12.5	1.25	9	36	273
ZC-M424A	4	4	2	1	33	132	70
ZC-M4254A		4	2.5	0.75	22	88	62
ZC-M4274A		4	2.7	0.65	17	68	60
ZC-M644A		6	4	1	20	80	107
ZC-M864A		8	6	1	14	56	140
ZC-M1084A		10	8	1	11	44	222
ZC-M12104A		12	10	1	9	36	317
ZC-M14124A		14	12	1	7.5	30	359
ZC-M15124A		15	12	1.5	11	44	467
ZC-M151254A		15	12.5	1.25	9	36	427
ZC-M425A	5	4	2	1	33	132	90
ZC-M4255A		4	2.5	0.75	22	88	81
ZC-M4275A		4	2.7	0.65	17	68	73
ZC-M645A		6	4	1	20	80	132
ZC-M865A		8	6	1	14	56	175
ZC-M1085A		10	8	1	11	44	268
ZC-M12105A	12	10	1	9	36	364	
ZC-M427A	7	4	2	1	33	132	116
ZC-M4257A		4	2.5	0.75	22	88	102
ZC-M4277A		4	2.7	0.65	17	68	97
ZC-M647A		6	4	1	20	80	185
ZC-M867A		8	6	1	14	56	243
ZC-M1087A		10	8	1	11	44	308
ZC-M4212A	12	4	2	1	33	132	199
ZC-M42512A		4	2.5	0.75	22	88	176
ZC-M42712A		4	2.7	0.65	17	68	167
ZC-M6412A		6	4	1	20	80	267
ZC-M8612A		8	6	1	14	56	426