


MACHINES AND ACCESSORIES - hose reels

REELCRAFT hose reels

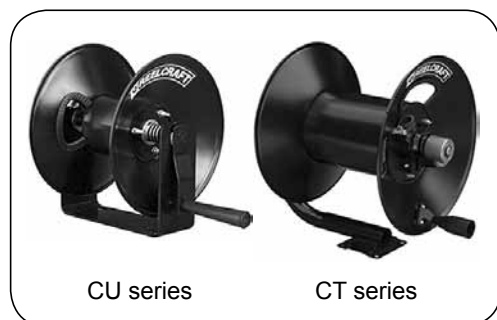

CU series

CT series

CU / CT series

Material: Powder coated steel

Working temp.: Up to +65°C

A hand crank hose reel designed for lighter-duty applications transferring air and water. Equipped with a brake to prevent hose unwinding when the reel is not used.

Advantages: Economical hose reel version for hose storing.

code	option	hose length [m]	hose I.D. [inch]	working pressure [bar]	weight [kg]	connection inlet / outlet [NPT female]	
low pressure hose reels							
RC-CU6050LN	without hose	15	3/8	21	5.00	3/8	3/8
RC-CU6100LN	without hose	30	3/8	21	7.00	3/8	3/8
RC-CU8050LN	without hose	15	1/2	21	6.00	1/2	1/2
RC-CU8100LN	without hose	30	1/2	21	9.00	1/2	1/2
high pressure hose reels							
RC-CT605OHN	without hose	15	3/8	345	6.00	1/2	3/8
RC-CT610OHN	without hose	30	3/8	345	7.50	1/2	3/8



30000 series - hand crank

Material: Powder coated steel

Working temp.: From -30°C up to +130°C

A highly durable hose reel, resistant to vibration. All bolted construction, no welded elements. Perfect for long hoses. Hand-driven hose reels are intended for industrial as well as field application. Hoses for 30000 series reels must be ordered separately. BA version, with a bevel crank, is also available. 30000 series hose reels can also be assembled on carts and trailers.

Advantages: Intended for long hoses.

code	for hose length [m]	hose I.D. [inch]	working pressure [bar]	weight [kg]	connection inlet / outlet [BSP female]
RC-CA32106M118	30	1/2	207	18.00	1/2"
RC-CA32112M118	60	1/2	207	21.00	1/2"
RC-CA32118M118	100	1/2	207	25.00	1/2"
RC-CA32128M118	153	1/2	207	30.00	1/2"
RC-CA33112M118	30	3/4	207	21.00	3/4"
RC-CA33118M118	54	3/4	207	25.00	3/4"
RC-CA33128M118	84	3/4	207	30.00	3/4"
RC-CA37118L118	30	1	21	26.00	1"
RC-CA37122L118	38	1	21	28.00	1"
RC-CA37128L118	47	1	21	30.00	1"