


Special tips for SMOOTHBORE and VISIFLON Teflon hoses (2):

AF-T tubular sleeves:

Sleeves made of tubing, designed for crimping terminals with a special "tail" for Teflon hoses SMOOTHBORE and VISIFLON. Material: zinc-plated carbon steel, stainless steel AISI 304 (303) or AISI 316 stainless steel. Crimping using special shaped jaws (see information on previous page).

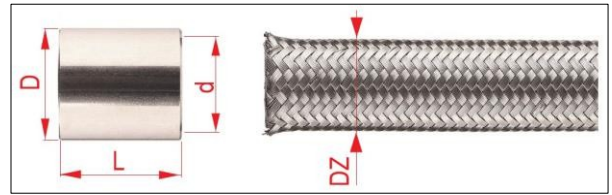

Nominal hose diameter		hose index (outside diameter DZ)		sleeve - galvanised carbon steel		sleeve - stainless steel AISI 304 (303)		sleeve - stainless steel AISI 316	
[inch]	[mm]	SMOOTHBORE	VISIFLON	index (no. of manufacturer)	d / D / L [mm]	index (no. of manufacturer)	d / D / L [mm]	index (no. of manufacturer)	d / D / L [mm]
1/8"	DN3	AF-HWSB-03 (6.1)	-	AF-T1-02 (01-120-02-02-04)	7,0 / 9,5 / 16	-	-	AF-T1-02-SS316 (01-120-02-02-01)	7,0 / 9,5 / 16
1/8"	DN3	AF-SWDB-03 (6.85) AF-HWDB-03 (7.05)	-	AF-T1-03 (01-120-03-03-04)	8,7 / 11,1 / 16	-	-	AF-T1-03-SS316 (01-120-03-03-01)	8,7 / 11,1 / 16
3/16"	DN5	AF-SWSB-05 (7.4) AF-HWSB-05 (7.65)	-						
1/4"	DN6	AF-SWSB-06 (8.5) AF-HWSB-06 (9.25)	-	AF-T1-04 (01-120-04-04-04)	10,3 / 12,7 / 16	AF-T1-04-SS (01-120-04-04-02)	10,3 / 12,7 / 16	-	-
3/16"	DN5	AF-SWDB-05 (8.7) AF-HWDB-05 (8.9)	-	AF-T2-04 (01-125-04-04-04)	11,8 / 14,3 / 16,8	AF-T2-04-SS (01-125-04-04-02)	11,8 / 14,3 / 16,8	-	-
1/4"	DN6	AF-SWDB-06 (10.05) AF-HWDB-06 (10.75)	-						
5/16"	DN8	AF-SWSB-08 (10.15) AF-HWSB-08 (10.9)	-						
5/16"	DN8	AF-SWDB-08 (11.55)	-	AF-T1-06 (01-120-06-06-04)	13,4 / 15,9 / 18	AF-T1-06-SS (01-120-06-06-02)	13,4 / 15,9 / 18	-	-
3/8"	DN10	AF-SWSB-10 (11.75) AF-HWSB-10 (12.5)	AF-VFSS-10 (11,95)	-	-	-	-	AF-T2-06-SS316 (01-180-06-06-01)	15/ 18 / 18
5/16"	DN8	AF-HWDB-08 (12.35)	-						
3/8"	DN10	AF-SWDB-10* (13.35) AF-HWDB-10* (14.1)	AF-VFPB-10* (13.0)	-	-	-	-	-	-
1/2"	DN13	AF-SWSB-13 (14.95) AF-HWSB-13 (15.6)	AF-VFSS-13 (15,25)	AF-T1-08 (01-120-08-08-04)	16,6 / 19 / 20,3	AF-T1-08-SS (01-120-08-08-02)	16,6 / 19 / 20,3	-	-
1/2"	DN13	AF-SWDB-13* (16.4) AF-HWDB-13* (16.9)	AF-VFPB-13* (16.8)	AF-T2-08 (01-150-08-08-04)	19/ 22,2 / 20,3	-	-	AF-T2-08-SS316 (01-180-08-08-01)	19,8/ 22,2 / 20,3
5/8"	DN16	AF-SWSB-16 (18.35) AF-HWSB-16 (19.1)	-	-	-	-	-	AF-T1-10-SS316 (01-150-10-10-01)	20,6/ 23,9 / 22,2
5/8"	DN16	AF-SWDB-16* (19.95) AF-HWDB-16* (20.75)	AF-VFSS-16 (21.2)	-	-	-	-	AF-T2-10-SS316 (01-180-10-10-01)	22,2/ 25,4 / 22,2
5/8"	DN16	-	AF-VFPB-16 (23.0)	AF-T2-12** (01-150-12-12-04)	25,4 / 28,6 / 22,5	AF-T2-12-SS** (01-240-12-12-02)	25,4 / 28,6 / 22,5	-	-
3/4"	DN19	AF-SWSB-19 (21.55) AF-HWSB-19 (22.05)	-	AF-T1-12 (01-120-12-12-04)	24,6 / 27,8 / 30,1	AF-T2-12-SS (01-240-12-12-02)	25,4 / 28,6 / 30,2	-	-
3/4"	DN19	-	AF-VFSS-19 (22,7)	AF-T2-12 (01-150-12-12-04)	25,4 / 28,6 / 30,2				
3/4"	DN19	AF-SWDB-19* (23.1) AF-HWDB-19* (23.8)	AF-VFPB-19 (24,7)	AF-T3-12 (01-180-12-12-04)	26,1 / 28,6 / 30,2				
1"	DN25	AF-SWSB-25 (28.15)	-	-	-	AF-T1-16-SS (01-120-16-16-02)	30,9/ 34 / 31,8	-	-
1"	DN25	AF-HWSB-25 (28.8)	AF-VFSS-25 (30,6)	AF-T2-16 (01-150-16-16-04)	31,8 / 34,9 / 31,8	AF-T2-16-SS (01-150-16-16-02)	31,8 / 34,9 / 31,8	-	-
1"	DN25	AF-SWDB-25* (29.6) AF-HWDB-25* (30.7)	AF-VFPB-25 (32,9)	-	-	-	-	AF-T3-16-SS316 (01-180-16-16-01)	33,8/ 37 / 31,8
1.1/4"	DN32	AF-HWDB-32 (36.9)	AF-VFSS-32 (36.0)	-	-	AF-T2-20-SS (01-150-20-20-02)	~/~/~	-	-
1.1/4"	DN32	-	AF-VFPB-32 (39,0)	-	-	AF-T3-20-SS (01-155-20-20-02)	~/~/~	-	-
1.1/2"	DN38	AF-HWDB-38 (43,75)	AF-VFSS-38 (47,0)	-	-	AF-T2-24-SS (01-150-24-24-02)	~/~/~	-	-
1.1/2"	DN38	-	AF-VFPB-38 (50,0)	-	-	AF-T3-24-SS (01-155-24-24-02)	~/~/~	-	-
2"	DN50	AF-HWDB-51 (56.4)	AF-VFSS-51 (61,0)	-	-	AF-T2-32-SS (01-150-32-32-02)	~/~/~	-	-
2"	DN50	-	AF-VFPB-51(64,0)	-	-	AF-T3-32-SS (01-155-32-32-02)	~/~/~	-	-

Notes: Tube sleeve dimensions approximate - inter alia due to tube tolerances; * - LARGE COLLAR ends - with increased lock; ** - shortened sleeve.