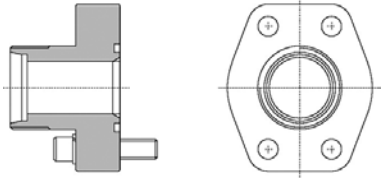
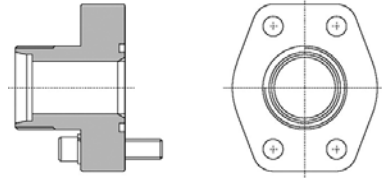
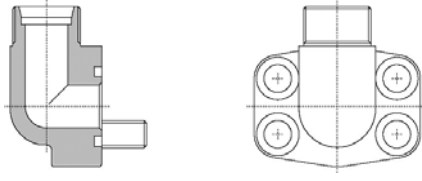



HIGH PRESSURE - adapters

SAE flange connectors

SAE flange connector 3000 / DIN 2353						
						
press. [bar]	code	flange dimension [inch]	pipe O.D. [mm]	thread size [mm]	bolt size [mm]	
348	HK-C3-M-08-12S	1/2	12	20x1.5	4 x M8	
	HK-C3-M-08-15L		15	22x1.5		
	HK-C3-M-08-16S		16	24x1.5		
	278	HK-C3-M-12-16S	3/4	16	24x1.5	4 x M10
		HK-C3-M-12-20S		20	30x2	
		HK-C3-M-12-22L	1	22	30x2	
		HK-C3-M-16-20S		20	30x2	
	210	HK-C3-M-16-25S	1.1/4	25	36x2	4 x M12
HK-C3-M-16-28L		28		36x2		
HK-C3-M-20-25S		25		36x2		
210	HK-C3-M-20-30S	1.1/2	30	42x2	4 x M12	
	HK-C3-M-20-35L		35	45x2		
	HK-C3-M-24-35L	2	35	45x2		
	HK-C3-M-24-38S		38	52x2		
	HK-C3-M-24-42L		42	52x2		
	HK-C3-M-32-38S		38	52x2		
HK-C3-M-32-42L	42	52x2				

SAE flange connector 6000 / DIN 2353						
						
press. [bar]	code	flange dimension [inch]	pipe O.D. [mm]	thread size [mm]	bolt size [mm]	
420	HK-C6-M-08-12S	1/2	12	20x1.5	4 x M8	
	HK-C6-M-08-14S		14	22x1.5		
	HK-C6-M-08-16S		16	24x1.5		
	278	HK-C6-M-12-16S	3/4	16	24x1.5	4 x M10
		HK-C6-M-12-20S		20	30x2	
		HK-C6-M-12-22L	1	22	30x2	
HK-C6-M-16-20S		20		30x2		
210	HK-C6-M-16-25S	1.1/4	25	36x2	4 x M12	
	HK-C6-M-16-28L		28	36x2		
	HK-C6-M-20-25S		25	36x2		
	210	HK-C6-M-20-30S	1.1/2	30	42x2	4 x M14
		HK-C6-M-20-35L		35	45x2	
		HK-C6-M-24-30S	1.1/2	30	45x2	
HK-C6-M-24-38S		38		52x2		
HK-C6-M-24-42L	42	52x2				

SAE 3000 90° flange connector / DIN 2353						
						
press. [bar]	code	flange dimension [inch]	pipe O.D. [mm]	thread size [mm]	bolt size [mm]	
348	HK-C3-M-90-08-12S	1/2	12	20x1.5	4 x M8	
	HK-C3-M-90-08-15L		15	22x1.5		
	HK-C3-M-90-08-16S		16	24x1.5		
	278	HK-C3-M-90-12-16S	3/4	16	24x1.5	4 x M10
		HK-C3-M-90-12-20S		20	30x2	
		HK-C3-M-90-12-22L	1	22	30x2	
		HK-C3-M-90-16-20S		20	30x2	
	210	HK-C3-M-90-16-25S	1.1/4	25	36x2	4 x M12
HK-C3-M-90-16-28L		28		36x2		
HK-C3-M-90-20-25S		25		36x2		
210	HK-C3-M-90-20-30S	1.1/2	30	42x2	4 x M12	
	HK-C3-M-90-20-35L		35	45x2		
	HK-C3-M-90-24-35L	2	35	45x2		
	HK-C3-M-90-24-38S		38	52x2		
	HK-C3-M-90-24-42L		42	52x2		
	HK-C3-M-90-32-38S		38	52x2		

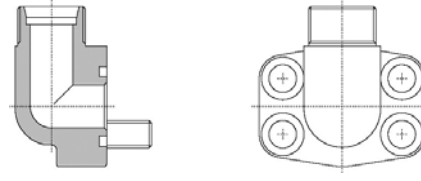SAE 6000 90° flange connector / DIN 2353						
						
press. [bar]	code	flange dimension [inch]	pipe O.D. [mm]	thread size [mm]	bolt size [mm]	
420	HK-C6-M-90-08-12S	1/2	12	20x1.5	4 x M8	
	HK-C6-M-90-08-14S		14	22x1.5		
	HK-C6-M-90-08-16S		16	24x1.5		
	278	HK-C6-M-90-12-16S	3/4	16	24x1.5	4 x M10
		HK-C6-M-90-12-20S		20	30x2	
		HK-C6-M-90-12-22L	1	22	30x2	
HK-C6-M-90-16-20S		20		30x2		
210	HK-C6-M-90-16-25S	1.1/4	25	36x2	4 x M12	
	HK-C6-M-90-16-28L		28	36x2		
	HK-C6-M-90-20-25S		25	36x2		
	210	HK-C6-M-90-20-30S	1.1/2	30	42x2	4 x M14
		HK-C6-M-90-20-35L		35	45x2	
		HK-C6-M-90-24-30S	1.1/2	30	42x2	
HK-C6-M-90-24-38S		38		52x2		
HK-C6-M-90-24-42L	42	52x2				