


INDUSTRIAL HOSES - metal

Stripwound hoses

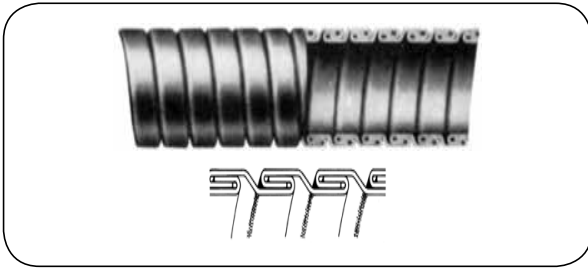

GRIPLOCK G

Material: Galvanized carbon steel

Working temp.: Up to +500°C

Flexible steel hose designed to transfer gas with fluid particles, smoke, fumes, dry loose materials (ash, dust, grain, granulated products). Widely used also as a protection hose. Assembled on exhaust outlets of engines to absorb vibration, noise and to limit thermal expansion. Standard version maintains shape. FLOPPY version that does not maintain shape is available up to 76 mm diameter (code example: WH-GRIPLOCK-G-006-F).

code	I.D. [mm]	O.D. [mm]	bending radius [mm]	weight [kg/m]
WH-GRIPLOCK-G-006	6	9	25	0.16
WH-GRIPLOCK-G-008	8	11	30	0.18
WH-GRIPLOCK-G-010	10	13	33	0.23
WH-GRIPLOCK-G-012	12	16	45	0.30
WH-GRIPLOCK-G-016	16	20	55	0.33
WH-GRIPLOCK-G-020	20	24	59	0.34
WH-GRIPLOCK-G-022	22	26	63	0.40
WH-GRIPLOCK-G-025	25	29	78	0.49
WH-GRIPLOCK-G-028	28	33	90	0.62
WH-GRIPLOCK-G-032	32	37	96	0.75
WH-GRIPLOCK-G-035	35	40	103	0.88
WH-GRIPLOCK-G-038	38	45	110	1.01
WH-GRIPLOCK-G-041	41	48	115	1.08
WH-GRIPLOCK-G-045	45	52	123	1.18
WH-GRIPLOCK-G-048	48	55	129	1.26
WH-GRIPLOCK-G-051	51	58	135	1.35
WH-GRIPLOCK-G-054	54	61	143	1.37
WH-GRIPLOCK-G-057	57	64	150	1.39
WH-GRIPLOCK-G-060	60	67	158	1.41
WH-GRIPLOCK-G-063	63	70	165	1.42
WH-GRIPLOCK-G-070	70	77	180	1.68
WH-GRIPLOCK-G-076	76	83	195	2.25
WH-GRIPLOCK-G-079	79	84	260	2.30
WH-GRIPLOCK-G-083	83	88	269	2.45
WH-GRIPLOCK-G-086	86	91	280	2.52
WH-GRIPLOCK-G-089	89	94	290	2.61
WH-GRIPLOCK-G-092	92	97	302	2.70
WH-GRIPLOCK-G-095	95	100	312	2.85
WH-GRIPLOCK-G-098	98	103	322	2.92
WH-GRIPLOCK-G-102	102	107	328	3.10
WH-GRIPLOCK-G-108	108	115	350	3.15
WH-GRIPLOCK-G-114	114	121	369	3.25
WH-GRIPLOCK-G-127	127	134	403	3.40
WH-GRIPLOCK-G-140	140	147	446	3.80
WH-GRIPLOCK-G-152	152	159	485	4.19
WH-GRIPLOCK-G-178	178	185	560	4.85
WH-GRIPLOCK-G-203	203	210	640	5.50
WH-GRIPLOCK-G-229	229	236	718	6.15
WH-GRIPLOCK-G-254	254	261	797	6.80
WH-GRIPLOCK-G-279	279	286	873	7.60
WH-GRIPLOCK-G-305	305	312	950	8.40
WH-GRIPLOCK-G-330	330	337	1030	8.98
WH-GRIPLOCK-G-356	356	363	1112	9.55
WH-GRIPLOCK-G-381	381	388	1188	10.25
WH-GRIPLOCK-G-406	406	413	1268	10.90
WH-GRIPLOCK-G-432	432	439	1348	11.60
WH-GRIPLOCK-G-457	457	464	1425	12.25